

11-08-00

A

11/06/00
JC940 U.S. PTO

| | |
|---|----------------------------|
| UTILITY PATENT APPLICATION TRANSMITTAL | Attorney Docket No. |
| (New Nonprovisional Applications Under 37 CFR § 1.53(b)) | 12421-0030/P04824 |

TO THE COMMISSIONER FOR PATENTS:

Transmitted herewith is the patent application of () application identifier or (X) first named inventor, Wanda Carol Garrett, et al. entitled Network-Based Integrated Device Identification and Ordering System, for a(n):

- (X) Original Patent Application.
- () Continuing Application (prior application not abandoned):
- () Continuation () Divisional () Continuation-in-part (CIP)
 - of prior application No: _____ Filed on: _____
 - () A statement claiming priority under 35 USC § 120 has been added to the specification.

Enclosed are:

- (X) Specification 31 Total Pages; (X) Drawing(s); 15 Total Sheets; (X) Cover Sheet 1 Page
- (X) Oath or Declaration and Power of Attorney: 3 Pages (unexecuted)
- () A Newly Executed Combined Declaration and Power of Attorney:
 - () Signed. (X) **Unsigned.** () Partially Signed.
- () A Copy from a Prior Application for Continuation/Divisional (37 CFR § 1.63(d)).
 - () Incorporation by Reference. The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied, is considered as being part of the disclosure of the accompanying application and is hereby incorporated herein by reference.
 - () Signed Statement Deleting Inventor(s) Named in the Prior Application. (37 CFR § 163(d)(2)).
- () Power of Attorney. (X) Return Receipt Postcard.
- () Associate Power of Attorney. (X) A Check in the amount of \$998.00 for the Filing Fee.
- () Preliminary Amendment. () Information Disclosure Statement and Form PTO-1449.
- () A Duplicate Copy of this Form for Processing Fee Against Deposit Account.
- () A Certified Copy of Priority Documents (if foreign priority is claimed).
- () Applicant claims small entity status. See 37 CFR 1.27.
- () Statement(s) of Status as a Small Entity Filed in Prior Application, Status Still Proper and Desired.
- () Other: _____

| CLAIMS AS FILED | | | | |
|---|-----------|-----------|---------|----------|
| FOR | NO. FILED | NO. EXTRA | RATE | FEE |
| Total Claims | 36 | 16 | \$18.00 | \$228.00 |
| Independent Claims | <u>2</u> | 0 | \$80.00 | \$ 0.00 |
| Multiple Dependent Claims (if applicable) | | | | \$0.00 |
| Assignment Recording Fee | | | | \$0.00 |
| Basic Filing Fee | | | | \$710.00 |
| Total Filing Fee | | | | \$998.00 |

Charge \$ _____ to Deposit Account 50-1302 pursuant to 37 CFR § 1.25. At any time during the pendency of this application, please charge any fees required or credit any overpayment to this Deposit Account.

Respectfully submitted,

By: [Signature]
 Brian D. Hickman, Attorney of Record, Reg. No. 35 894

Date: November 6, 2000

Correspondence Address:

Hickman Palermo Truong & Becker, LLP
 1600 Willow Street
 San Jose, California 95125-5106
 Telephone: (408) 414-1080
 Facsimile: (408) 414-1076

I hereby certify that this is being deposited with the U.S. Postal Service "Express Mail Post Office to Addressee" service under 37 CFR § 1.10 on the date indicated below and is addressed to:

Commissioner for Patents
 Box Patent Application
 Washington, D.C. 20231

By: [Signature]

Typed Name: Susan J. Johnson

Express Mail Label No.: EL624355936US

Date of Deposit: November 6, 2000

JC825 U.S. PTO
 09/707325
 11/06/00

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

FEE TRANSMITTAL for FY 2000

Patent fees are subject to annual revision,
Small Entity payments must be supported by a small entity statement,
otherwise large entity fees must be paid. See Forms PTO/SB/09-12.
See 37 C.F.R. §§ 1.27 AND 1.28

TOTAL AMOUNT OF PAYMENT (\$998.00)

Complete if Known

| | |
|----------------------|---------------------|
| Application Number | Not yet assigned |
| Filing Date | Herewith |
| First Named Inventor | Wanda Carol Garrett |
| Examiner Name | Not yet assigned |
| Group/Art Unit | Not yet assigned |
| Attorney Docket No. | 12421-0030/P04824 |

METHOD OF PAYMENT (check one)

1. ☐ The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to:Deposit
Account
Number

50-1302

Deposit
Account
Name

Hickman Palermo Truong & Becker, LLP

☒ Charge Any Additional Fee Required
Under 37 CFR §§ 1.16 and 1.172. ☒ Payment Enclosed:☒ Check ☐ Money
Order ☐ Other3. ☐ Applicant claims small entity status. See 37
CFR 1.27

FEE CALCULATION (continued)

3. ADDITIONAL FEES

| Large Entity Fee Code | Large Entity Fee (\$) | Small Entity Fee Code | Small Entity Fee (\$) | Fee Description | Fee Paid |
|-----------------------------|-----------------------------|-----------------------------|-----------------------------|--|----------|
| 105 | 130 | 205 | 65 | Surcharge - late filing fee or oath | |
| 127 | 50 | 227 | 25 | Surcharge - late provisional filing fee or cover sheet. | |
| 139 | 130 | 139 | 130 | Non-English specification | |
| 112 | 920* | 112 | 920* | Requesting publication of SIR prior to Examiner action | |
| 113 | 1,840* | 113 | 1,840* | Requesting publication of SIR after Examiner action | |
| 115 | 110 | 215 | 55 | Extension for reply within first month | |
| 116 | 390 | 216 | 195 | Extension for reply within second month | |
| 117 | 890 | 217 | 445 | Extension for reply within third month | |
| 118 | 1,390 | 218 | 695 | Extension for reply within fourth month | |
| 128 | 1,890 | 228 | 945 | Extension for reply within fifth month | |
| 119 | 310 | 219 | 155 | Notice of Appeal | |
| 120 | 310 | 220 | 155 | Filing a brief in support of an appeal | |
| 121 | 270 | 221 | 135 | Request for oral hearing | |
| 138 | 1,510 | 138 | 1,510 | Petition to institute a public use proceeding | |
| 140 | 110 | 240 | 55 | Petition to revive - unavoidable | |
| 141 | 1,210 | 241 | 605 | Petition to revive - unintentional | |
| 142 | 1,210 | 242 | 605 | Utility issue fee (or reissue) | |
| 143 | 430 | 243 | 215 | Design issue fee | |
| 144 | 580 | 244 | 290 | Plant issue fee | |
| 122 | 130 | 122 | 130 | Petitions to the Commissioner | |
| 123 | 50 | 123 | 50 | Petitions related to provisional applications | |
| 126 | 240 | 126 | 240 | Submission of information Disclosure Stmt | |
| 581 | 40 | 581 | 40 | Recording each patent assignment per property (times number of properties) | |
| 146 | 690 | 246 | 345 | Filing a submission after final rejection (37 CFR § 1.129(a)) | |
| 149 | 690 | 249 | 345 | For each additional invention to be examined (37 CFR § 1.129(b)) | |
| Other fee (specify) _____ | | | | | |
| Other fee (specify) _____ | | | | | |

FEE CALCULATION

1. BASIC FILING FEE

| Large Entity Fee Code | Large Entity Fee (\$) | Small Entity Fee Code | Small Entity Fee (\$) | Fee Description | Fee Paid |
|-----------------------------|-----------------------------|-----------------------------|-----------------------------|------------------------|----------|
| 101 | 710 | 201 | 355 | Utility filing fee | 710.00 |
| 106 | 320 | 206 | 160 | Design filing fee | |
| 107 | 490 | 207 | 245 | Plant filing fee | |
| 108 | 710 | 208 | 355 | Reissue filing fee | |
| 114 | 150 | 214 | 75 | Provisional filing fee | |

SUBTOTAL (1) (\$710.00)

2. EXTRA CLAIM FEES

| Total Claims | Extra Claims | Fee from Below | Fee Paid |
|--------------------|--------------|----------------|----------|
| 36 | -20**= 16 | 18.00 | \$288 |
| 2 | -3**= -0- | 80.00 | -0- |
| Multiple Dependent | | | -0- |

**or number previously paid, if greater; For Reissues, see below

| Large Entity Fee Code | Large Entity Fee (\$) | Small Entity Fee Code | Small Entity Fee (\$) | Fee Description |
|-----------------------------|-----------------------------|-----------------------------|-----------------------------|---|
| 103 | 18 | 203 | 9 | Claims in excess of 20 |
| 102 | 80 | 202 | 40 | Independent claims in excess of 3 |
| 104 | 270 | 204 | 135 | Multiple dependent claim, if not paid |
| 109 | 80 | 209 | 40 | **Reissue independent claims over original patent |
| 110 | 18 | 210 | 9 | **Reissue claims in excess of 20 and over original patent |

SUBTOTAL (2) (\$998.00)

*Reduced by Basic Filing Fee Paid

SUBTOTAL (3)

(\$)

SUBMITTED BY

Name (Print/Type) Brian D. Hickman

Signature

Registration No
(Attorney/Agent)

35,894

Complete (if applicable)

Telephone

(408) 414-1080

Date

November 6, 2000

WARNING:

Information on this form may become public. Credit card information should not be
Included on this form. Provide credit card information and authorization on PTO-2038.

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231
DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, Washington, DC 20231

12421-0030

Patent

UNITED STATES PATENT APPLICATION

FOR

NETWORK-BASED INTEGRATED DEVICE IDENTIFICATION AND ORDERING
SYSTEM

INVENTORS:

**WANDA CAROL GARRETT
MARTIN GARRISON
JEFFREY ROBERT PERRY
REX LIEBERT ALLISON, III
RICHARD JOEL LEVIN
VANDANA SOJORANI**

PREPARED BY:

**HICKMAN PALERMO TRUONG & BECKER LLP
1600 WILLOW STREET
SAN JOSE, CALIFORNIA 95125
(408) 414-1080**

EXPRESS MAIL CERTIFICATE OF MAILING


"Express Mail" mailing label number EL624353936 US

Date of Deposit November 6, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Susan J. Johnson

(Typed or printed name of person mailing paper or fee)

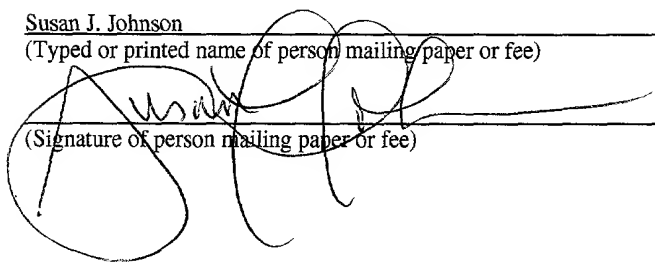
(Signature of person mailing paper or fee)

NETWORK-BASED INTEGRATED DEVICE IDENTIFICATION AND ORDERING SYSTEM

FIELD OF THE INVENTION

5 The present invention relates to techniques for online identification and ordering components that satisfy user-specified circuit requirements.

BACKGROUND OF THE INVENTION

10 When a user requires a circuit, the user frequently knows little more than the requirements that the circuit must satisfy. To obtain the desired circuit, the user may provide a list of the requirements to a third party that is knowledgeable about those types of circuits, how to design them, and where to obtain the components to make them. That third party may then construct and supply the user with the circuit, with a significant price mark up for the service of designing, obtaining components and constructing the circuit based on the
15 specified requirements.

 To avoid having to pay the marked up prices that would be required by a third party, the user may attempt to become educated on circuit design, and obtain parts catalogs from circuit component suppliers. However, the effort required to gain the requisite education and knowledge may not be worth the savings that are achieved thereby. To reduce the effort
20 required to perform some of these tasks, the user may obtain and install specialized client-side tools, such as the Switches Made Simple software product available from National Semiconductor Corporation. While such tools may assist in the circuit design and component selection tasks, the user must still go through the manual process of placing orders for the components. Further, given the rapidity with which circuit component
25 manufacturers change their product lines, the component information used by the specialized client-side software will quickly become outdated unless frequently updated. The

inconvenience of having to obtain, install, and keep such specialized software updated does not make this the solution ideal.

Based on the foregoing, it is desirable to provide techniques that allow a user that has specific circuit requirements to obtain a circuit that satisfies those requirements, or the
5 components to make such a circuit, without the user having to obtain additional education or possess specialized software.

12421-0030

SUMMARY OF THE INVENTION

Techniques are provided for designing a circuit that satisfies user-specified functional requirements without the user having to obtain additional education or possess specialized software. According to one embodiment, user-specified functional requirements are received
5 over a network from a client executing a browser. The network may be, for example, the Internet. Based on the user-specified requirements, components and a topology for constructing the circuit are automatically determined. The components determined during this operation have operational values such that, when the components are arranged according to the topology to form the circuit, the circuit satisfies the user-specified functional
10 requirements. One or more web pages that identify the components are then delivered to the browser over the network. According to one aspect of the invention, the component and topology information is used to generate a schematic diagram that is delivered in a web page to the user over the network. According to another aspect of the invention, the user is provided with a web page that has a control which, when selected, initiates an operation for
15 placing an order over said network for one of the components, a kit of all of the components, a custom made circuit made from the components, and/or a prefabricated circuit that is functionally similar to the one that was designed.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is illustrated by way of example, and not by way of limitation, in the figures of the accompanying drawings and in which like reference numerals refer to similar elements and in which:

5 FIG. 1 is a block diagram of a system configured to allow online identification and ordering of components according to an embodiment of the invention;

FIG. 2 illustrates an initial web page that may be presented by a system that implements an embodiment of the invention;

10 FIG. 3 illustrates a web page for receiving user-specified requirements according to an embodiment of the invention;

FIG. 4 illustrates a web page of suggested components according to an embodiment of the invention;

FIGs. 5A-5G illustrate a web page that displays product folder information for a particular component, according to an embodiment of the invention;

15 FIG. 6 illustrates a web page of designed circuit components according to an embodiment of the invention;

FIGs. 7A-7B illustrate a web page showing the operation values of a circuit designed using the designed circuit components, according to an embodiment of the invention;

20 FIG. 8 illustrates a web page that illustrates a schematic diagram of a circuit that uses the designed circuit components according to an embodiment of the invention;

FIG. 9 illustrates a control panel that contains controls to analyze the circuit shown in FIG. 8;

FIG. 10 illustrates a web page for ordering the designed circuit components, according to an embodiment of the invention;

FIG. 11 illustrates a web page that displays the circuit designs that have been previously saved by a user on user-side storage, according to an embodiment of the invention; and

FIG. 12 is a block diagram of a computer system that may be used to implement
5 embodiments of the invention.

FIG. 11

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Techniques are described that allow online identification and ordering components that satisfy user-specified circuit requirements. In the following description, for the purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding of the present invention. It will be apparent, however, to one skilled in the art that the present invention may be practiced without these specific details. In other instances, well-known structures and devices are shown in block diagram form in order to avoid unnecessarily obscuring the present invention.

SYSTEM OVERVIEW

FIG. 1 is a block diagram that gives an overview of a system 100 used to implement the techniques described hereafter. System 100 includes numerous functional modules that communicate with a client 150 over the Internet 130. While the Internet 130 is used for the purposes of explanation, the network over which the modules communicate with the client 150 may vary from implementation to implementation. In an Internet-based embodiment, the communication between the modules and the client 150 may be performed using the HTTP protocol and one or more web servers (not shown). In the illustrated embodiment, the modules include a requirements form module 110, a component determination module 112, a circuit design module 114, a schematic design generation module 116 and a component acquisition module 118. The functions of each of these modules shall be described in greater detail hereafter.

FUNCTIONAL OVERVIEW

According to one embodiment of the invention, a system is provided by which users, with no special client-side software, and little or no knowledge of available circuit components, can easily and efficiently create, test, and order circuits and components that

satisfy their functional requirements. According to one implemented embodiment, the user is presented with a series of web pages to achieve this result, beginning with the web page illustrated in FIG. 2.

Referring to FIG. 2, the web page contains text 202 that explains the four general steps of the process to the user, and contains links (e.g. links 204 and 206) to web pages that serve as the interface through which the system walks the user through those steps. It should be noted that many of the links “to web pages” are actually links that result in the execution of software modules which produce, as output, the web pages that are delivered to the user.

SUGGESTING COMPONENTS BASED ON USER-SPECIFIED REQUIREMENTS

For the purpose of explanation, it shall be assumed that a user desires to create a power supply. Accordingly, the user selects link 204 of the web page shown in FIG. 2. While the techniques described herein shall be described in the context of designing and ordering parts for a power supply circuit, the techniques are not limited to any particular type of circuit.

According to one embodiment, a web server responds to selection of link 204 by invoking the requirements form module 110. The requirements form module 110 provides one or more “requirements” web pages to the web client 150. The requirements web pages allow the user of the client to specify requirements for a circuit. FIG. 3 is an example of a requirements web page for receiving the requirement information from a user for a power supply circuit. The illustrated requirements page includes user interface controls for specifying minimum and maximum input voltages (controls 302), and an output voltage and amperage (controls 304). The requirements web page further includes controls 306 for additional requirements, such as whether the circuit requires an ON/OFF pin. Other requirements that may apply to a power circuit, for example, may include requirements associated with efficiency, frequency, etc. It should be noted that the specific user interface

controls presented by the requirements web pages will vary from implementation to implementation based on a variety of factors, including the type of circuit for which the requirements are being specified.

The requirements information entered by the user into the requirements web pages is transmitted back to the web server. The operation of sending the requirements information to the server may be initiated, for example, by the user selecting a particular control (e.g. button 308) on the requirements web page.

Based on the requirements information, a component determination module 112 determines the components that could be used to build a circuit that would satisfy the specified requirements, and generates one or more “suggested component” web pages. The process of determining the components that could satisfy the specified requirements may be implemented, for example, by applying filters to component data stored in a database. The filters may, for example, compare the values specified in the “output voltage” and “output current” fields of the requirements web page against values in corresponding columns of a “component” table in a database.

The process may also involve using values from the requirements information as input into formulas, where the output of the formulas is used to determine which components could satisfy the specified requirements. For example, assume that the user desires a boost regulator circuit. Integrated circuits used in boost regulators have a switch current rating.

The switch current rating of each integrated circuit that can be used in a boost regulator may be stored in the record for that integrated circuit in a database. To determine which integrated circuit may be used, the input voltage, output voltage and output current specified in the requirements information are used to calculate a required switch current rating, and the required switch current rating is compared against the switch current ratings in the database to select those integrated circuits within the database that can satisfy the specified requirements.

FIG. 4 is an example of a suggested component web page generated in response to the requirements specified in FIG. 3. In the present example, the suggested components fall into two categories: switching regulators for use in a Buck Topology, and switching regulators for use in a Flyback Topology. An understanding of the distinction between these categories of switching regulators is not important for the purpose of understanding the techniques described herein. However, it is significant to note that such distinctions may be relevant to the user designing the power circuit. Therefore, the component determination module 112 generates the suggested component web page in a manner that groups the suggested components into those and any other applicable categories.

The component determination module 112 further includes in the suggested component web page other information relevant to the user's selection of a component. In the illustrate embodiment, the other information includes the Maximum current, the efficiency, whether the component has an ON/OFF pin or an Error pin, a field for "other features", the frequency of the component and an estimated price of the component.

In the illustrated implementation, the names of the suggested components are presented in the form of links. Selection of the link associated with a component results in the delivery of a "product folder". The product folder is a web page that presents detailed information about a component. For example, selecting the link 402 associated with the LM2575-3.3 component produces the product folder web page shown on FIGs. 5A-5G. The information and controls contained on the product folder web page of a component shall be described in greater detail hereafter.

The information contained in the suggested component web pages, and the product folders of the components listed in the suggested component web pages, satisfies only part of the users needs. In particular, the user is interested in creating an entire circuit that satisfies the specified requirements, and not merely in identifying a component that could be used in such a circuit. Therefore, according to one embodiment of the invention, the user is

presented with a control for automatically generating the design of such a circuit using a component selected from the suggested component web pages.

AUTOMATIC CIRCUIT DESIGN

5 Referring again to FIG. 4, the listing for each component includes a field that contains a button which, when selected, causes the automatic generation of a circuit design that (1) uses the selected component, and (2) satisfies the specified requirements that were initially entered by the user. For example, assume that the user determines, based on the information contained on the suggested components web page and, optionally, the more detailed
10 information on product folder web pages, that the LM2575-3.3 component is the best of the suggested components for the user's purpose. The user may then click on the "create design" button 404 associated with that component to cause generation of a power circuit that (1) uses the LM2575-3.3 component, and (2) satisfies the requirements specified on the requirements web page shown on FIG. 3.

15 According to one embodiment, selection of a create design button causes a message that (1) indicates the requirement information and (2) identifies the selected component to be sent to a circuit design module 114. In response, the circuit design module 114 designs a circuit that uses the selected component and satisfies the specified requirements. Specifically, the circuit design module 114 determines components that will be required for
20 the circuit in addition to the selected component, and how those components should be arranged to create the circuit (the circuit "topology").

Various techniques may be used by the circuit design module 114 to determine the topology of the circuit. For example, numerous topology "templates" may be stored on the server-side at a location accessible to the circuit design module 114. Data may also be stored
25 that associates general types of circuits with one or more of the topology templates. In an embodiment that uses topology templates, the circuit design module 114 selects the topology

template based on the type of circuit that is being designed, and then uses the selected topology template, the selected suggested component, and the requirements information to determine the other components required for the circuit.

According to one embodiment, the circuit design module 114 transmits back to the user one or more “bill of materials” web pages. The bill of materials web pages identify the components that are included in the circuit designed by the circuit design module 114 (referred to herein collectively as the “designed circuit components”). The designed circuit components thus include the selected component and the additional components determined by the circuit design module 114.

For the purpose of illustration, it shall be assumed that the user selects the create design button associated with the LM2672-3.3 component. FIG. 6 illustrates a bill of materials web page that indicates the components used in the circuit design generated by the circuit design module 114. In addition to the selected LM2672-3.3 component, the bill of materials web page lists numerous other designed circuit components from a variety of manufacturers. If the user desires to substitute any of the designed circuit components listed in the bill of materials page for a functionally equivalent component, the user may select the “select alternate part” button associated with that component. In response to selection of the “select alternate part” button associated with a component, the user is presented with a list of functionally equivalent components. Such substitutions may be desirable, for example, if the user desires components from a particular manufacturer.

Once the user has made any desired component substitutions, the user may select the operating values control to obtain operating value information for the circuit created by the circuit design module 114 using the parts listed in the bill of materials page. FIGs. 7a and 7b illustrate a web page showing the operating parameters for the circuit associated with the bill of materials of FIG. 6. From either the bill of materials web page or the operating values

web page, the user may select a “schematic” control 604 to cause a schematic diagram of the circuit to be generated.

In response to selection of the schematic control 604, one or more messages identifying the designed circuit components, as well as the topology data for the generated circuit, are sent to a schematic diagram generation module 116. The schematic diagram generation module 116 generates one or more web pages that include a schematic diagram of the circuit, and delivers the schematic web pages to the user.

SCHEMATIC DIAGRAM GENERATION

Referring to FIG. 8, it illustrates a schematic diagram web page that may be generated and delivered to a user in response to user selection of schematic button 604. As illustrated in FIG. 8, the schematic diagram includes the components identified in the bill of materials page arranged in a circuit that satisfies the requirements that were originally specified by the user. According to one embodiment, the schematic diagram generation module 116 used to generate the schematic web pages is the WebSIM module available from Transim, Inc. The WebSIM module provides a control panel button 802 which, when selected, causes the generation of a control panel window (shown in FIG. 8) that includes controls that allow the user to analyze the displayed circuit. The specific features of the WebSIM module are beyond the scope of the present invention, and therefore shall not be described in detail.

While the illustrated embodiment uses the WebSIM module for generating schematic diagram web pages, the present invention is not limited to any particular schematic diagram generation module 116. Any module capable of generating a schematic diagram based on a list of components and schematic information may be used.

BUILDING THE CIRCUIT

According to one embodiment, one or more of the web pages provided to the user include a control which, when selected, invokes a component acquisition module. The component acquisition module, in turn, provides one or more component acquisition web pages to the user. The component acquisition web pages include information and/or controls for ordering the components from which the generated circuit is constructed.

In the embodiment illustrated in the figures, a “build it” button 606 (see, e.g., FIGs. 6, 7a, 8 and 9) is provided which, when selected, provides component acquisition web pages to the user. The component acquisition web page presented to the user in response to selection of build it button 606 may, for example, contain the information shown in FIG. 10. Referring to FIG. 10, the component acquisition web page includes a table that lists, for each component, a manufacturer, a part number, attributes, price, and distributor. The table also includes an “Order Parts” column that includes controls which, when selected, initiate an online ordering operation for the corresponding component. According to one embodiment, the component acquisition web page may also include an “order kit” button 1002 which, when selected, initiates an online ordering operation for a kit that includes all of the components required to make the circuit.

Typically, the party that would handle the order of a single component would be the manufacturer or distributor of the component. However, the party that handles the “kit” order may be a third party. In response to the order of a kit, the party from whom the kit is ordered places corresponding component orders with the component manufacturers. The process of placing the corresponding component order can be executed automatically upon receipt and approval of a kit order.

If the user selects the “order kit” button, the user will receive the components to make the circuit. However, the user may prefer to receive the circuit itself, already assembled. Therefore, the user may alternatively or additionally be presented with an “order circuit”

button (not shown) which, when selected, causes the components to be ordered and sent to a circuit board maker. The circuit board maker constructs the circuit board from the ordered components and delivers the custom-made circuit board to the user that placed the order.

Under some circumstances, circuit board manufacturers may already have
5 prefabricated circuit boards that are similar to the automatically designed circuit. According to one embodiment, the server-side database includes information about such prefabricated circuit boards, and presents them to the user when the similarity between the prefabricated boards and the users requirements exceeds a predetermined similarity threshold. The prefabricated boards may be presented, for example, on the suggested component web page,
10 the bill of materials web page, and/or the component acquisition web page.

PERSISTENT STORAGE OF DESIGNS

A user may not be prepared to order the components of a circuit during the same session in which the circuit is generated for the user using the techniques described above.
15 Therefore, according to one embodiment of the invention, a mechanism is provided for storing the designs persistently on a server-side storage device. The designs may be stored, for example, in a server-side database that associates the designs with the user-id of the user that created the design. The event that triggers the storage of a design in the database may be, for example, the creation of the design. Alternatively, a control may be provided which,
20 when selected, causes the designs to be saved.

Referring to FIG. 3, the requirements web page includes a “my designs” control 310. When a user selects the my designs control 310, a saved designs web page that lists all of the saved designs for the user is presented to the user. FIG. 11 illustrates is an example of a saved designs web page. The saved designed web page illustrated in FIG. 11 includes
25 listings of a user’s previously saved designs. The listing includes, for each saved design, a design ID, a design name, the model number of the integrated circuit around which the

design is built, the creation date of the design, modification dates to the design, the name of the “design assistant” tool used to create the design, comments, and a design operation field.

Controls are provided to allow the user to change the design name of a design, to add comments about the design, and to modify, analyze, build, or delete the design. Selection of the modify, analyze or build controls results in the delivery of an appropriate web page, as described above. Selection of the delete, change name or add comments controls causes corresponding information to be deleted, changed, or added to the server-side database.

According to one embodiment, controls (not shown) are provided for “sharing” a design with another user. Specifically, a first user may select one or more of the first user’s designs, and then specify one or more second users with whom the design is to be shared. In response, the server-side database is updated to establish an association between the design and the one or more second users. When one of the second users is presented with a list of available saved designs, any designs that have been shared with the user are included in the list.

PRODUCT FOLDER WEB PAGES

Referring to Figures 5A-5G, they illustrate a product folder web page for the LM2575 component, according to one embodiment of the invention. In the illustrated embodiment, the product folder web page includes links 502 to related components, a parametric table 504 showing the operating parameter of the component, and numerous sections, including a General Description section, a Features section, an Applications section, a Datasheet section, a Package Availability, Models, Samples & Pricing section, a Design Tools section, and an Application Notes section.

The General Description section includes a general description of the component. The Features section lists the features of the component. The Applications section lists

applications in which the component is typically used. The Datasheet section contains links to view online or download the data sheets for the component.

The Package Availability, Models, Samples & Pricing section lists packages that use the component, indicates the status, availability and price of the packages, and contains controls which, when selected initiate an operation for placing an order for the packages. The Design Tools section includes a link to view online or download information about software tools that may be used to assist in designing circuits that use the component. The Application Notes section includes links to view online or download information about applications that use the component.

HARDWARE OVERVIEW

Figure 12 is a block diagram that illustrates a computer system 1200 upon which an embodiment of the invention may be implemented. Computer system 1200 includes a bus 1202 or other communication mechanism for communicating information, and a processor 1204 coupled with bus 1202 for processing information. Computer system 1200 also includes a main memory 1206, such as a random access memory (RAM) or other dynamic storage device, coupled to bus 1202 for storing information and instructions to be executed by processor 1204. Main memory 1206 also may be used for storing temporary variables or other intermediate information during execution of instructions to be executed by processor 1204. Computer system 1200 further includes a read only memory (ROM) 1208 or other static storage device coupled to bus 1202 for storing static information and instructions for processor 1204. A storage device 1210, such as a magnetic disk or optical disk, is provided and coupled to bus 1202 for storing information and instructions.

Computer system 1200 may be coupled via bus 1202 to a display 1212, such as a cathode ray tube (CRT), for displaying information to a computer user. An input device 1214, including alphanumeric and other keys, is coupled to bus 1202 for communicating information

and command selections to processor 1204. Another type of user input device is cursor control 1216, such as a mouse, a trackball, or cursor direction keys for communicating direction information and command selections to processor 1204 and for controlling cursor movement on display 1212. This input device typically has two degrees of freedom in two axes, a first
5 axis (e.g., x) and a second axis (e.g., y), that allows the device to specify positions in a plane.

The invention is related to the use of computer system 1200 for implementing the techniques described herein. According to one embodiment of the invention, those techniques are performed by computer system 1200 in response to processor 1204 executing one or more sequences of one or more instructions contained in main memory 1206. Such
10 instructions may be read into main memory 1206 from another computer-readable medium, such as storage device 1210. Execution of the sequences of instructions contained in main memory 1206 causes processor 1204 to perform the process steps described herein. In alternative embodiments, hard-wired circuitry may be used in place of or in combination with software instructions to implement the invention. Thus, embodiments of the invention are
15 not limited to any specific combination of hardware circuitry and software.

The term "computer-readable medium" as used herein refers to any medium that participates in providing instructions to processor 1204 for execution. Such a medium may take many forms, including but not limited to, non-volatile media, volatile media, and transmission media. Non-volatile media includes, for example, optical or magnetic disks, such
20 as storage device 1210. Volatile media includes dynamic memory, such as main memory 1206. Transmission media includes coaxial cables, copper wire and fiber optics, including the wires that comprise bus 1202. Transmission media can also take the form of acoustic or light waves, such as those generated during radio-wave and infra-red data communications.

Common forms of computer-readable media include, for example, a floppy disk, a
25 flexible disk, hard disk, magnetic tape, or any other magnetic medium, a CD-ROM, any other optical medium, punchcards, papertape, any other physical medium with patterns of holes, a

RAM, a PROM, and EPROM, a FLASH-EPROM, any other memory chip or cartridge, a carrier wave as described hereinafter, or any other medium from which a computer can read.

Various forms of computer readable media may be involved in carrying one or more sequences of one or more instructions to processor 1204 for execution. For example, the instructions may initially be carried on a magnetic disk of a remote computer. The remote computer can load the instructions into its dynamic memory and send the instructions over a telephone line using a modem. A modem local to computer system 1200 can receive the data on the telephone line and use an infra-red transmitter to convert the data to an infra-red signal. An infra-red detector can receive the data carried in the infra-red signal and appropriate circuitry can place the data on bus 1202. Bus 1202 carries the data to main memory 1206, from which processor 1204 retrieves and executes the instructions. The instructions received by main memory 1206 may optionally be stored on storage device 1210 either before or after execution by processor 1204.

Computer system 1200 also includes a communication interface 1218 coupled to bus 1202. Communication interface 1218 provides a two-way data communication coupling to a network link 1220 that is connected to a local network 1222. For example, communication interface 1218 may be an integrated services digital network (ISDN) card or a modem to provide a data communication connection to a corresponding type of telephone line. As another example, communication interface 1218 may be a local area network (LAN) card to provide a data communication connection to a compatible LAN. Wireless links may also be implemented. In any such implementation, communication interface 1218 sends and receives electrical, electromagnetic or optical signals that carry digital data streams representing various types of information.

Network link 1220 typically provides data communication through one or more networks to other data devices. For example, network link 1220 may provide a connection through local network 1222 to a host computer 1224 or to data equipment operated by an

Internet Service Provider (ISP) 1226. ISP 1226 in turn provides data communication services through the world wide packet data communication network now commonly referred to as the "Internet" 1228. Local network 1222 and Internet 1228 both use electrical, electromagnetic or optical signals that carry digital data streams. The signals through the various networks and the signals on network link 1220 and through communication interface 1218, which carry the digital data to and from computer system 1200, are exemplary forms of carrier waves transporting the information.

Computer system 1200 can send messages and receive data, including program code, through the network(s), network link 1220 and communication interface 1218. In the Internet example, a server 1230 might transmit a requested code for an application program through Internet 1228, ISP 1226, local network 1222 and communication interface 1218.

The received code may be executed by processor 1204 as it is received, and/or stored in storage device 1210, or other non-volatile storage for later execution. In this manner, computer system 1200 may obtain application code in the form of a carrier wave.

In the foregoing specification, the invention has been described with reference to specific embodiments thereof. It will, however, be evident that various modifications and changes may be made thereto without departing from the broader spirit and scope of the invention. The specification and drawings are, accordingly, to be regarded in an illustrative rather than a restrictive sense.

CLAIMS

What is claimed is:

1. A method for designing a circuit that satisfies user-specified functional requirements, the method comprising the steps of:
receiving said user-specified functional requirements over a network from a client;
automatically determining, based on said user-specified requirements, components and a topology for constructing said circuit;
wherein the step of determining components includes determining components that have operational values such that, when said components are arranged according to said topology to form said circuit, the circuit satisfies said user-specified functional requirements; and
delivering to said client over said network component information that identifies said components.
2. The method of Claim 1 wherein:
the client is executing a browser; and
the step of delivering said component information includes delivering to said browser one or more web pages that identify said components.
3. The method of Claim 2 wherein the step of delivering includes delivering one or more web pages that identify said components and that include at least one control which, when selected, initiates an operation for placing an order over said network for at least one of said components.
4. The method of Claim 3 wherein the step of automatically determining components includes the steps of:

3 automatically determining, based on said user-specified requirements, a plurality of
4 suggested components, each of which may be used to design a circuit that
5 satisfies said user-specified functional requirements;
6 delivering to said browser over said network one or more suggested component web
7 pages that identify said plurality of suggested components;
8 in response to selection of a suggested component of said plurality of suggested
9 components identified in said one or more suggested component web pages,
10 receiving from said browser over said network a message that identifies the
11 selected suggested component; and
12 automatically determining, based on said user-specified requirements and said
13 selected suggested component, components for constructing a circuit that
14 includes said selected suggested component and that satisfies said user-
15 specified functional requirements.

1 5. The method of Claim 4 wherein the step of delivering to said browser over said
2 network one or more suggested component web pages includes delivering one or
3 more suggested component web pages that specify, for each suggested component of
4 said plurality of suggested components, a price value.

1 6. The method of Claim 4 wherein the step of delivering to said browser over said
2 network one or more suggested component web pages includes delivering one or
3 more suggested component web pages that specify, for each suggested component of
4 said plurality of suggested components, a component identifier and one or more
5 operating values.

1 7. The method of Claim 3 further comprising the steps of:

2 determining a set of alternative components for a particular component of said
3 components, wherein each alternative component in said set of alternative
4 components may be used in said circuit in place of a particular component;
5 delivering to said browser over said network one or more web pages that identify said
6 components and that include a control that is associated said particular
7 component;
8 in response to selection of said control, displaying on said browser said set of
9 alternative components; and
10 in response to selection of one of said alternative components, updating said design to
11 include said selected alternative component in place of said particular
12 component.

1 8. The method of Claim 3 wherein said operation for placing an order is an operation for
2 placing an order for a kit that includes a plurality of said components.

1 9. The method of Claim 8 wherein said operation for placing an order is an operation for
2 placing an order for a kit that includes all of said components.

1 10. The method of Claim 3 wherein said operation for placing an order is an operation for
2 placing an order with another party for the other party to construct a said circuit.

1 11. The method of Claim 3 further comprising the step of automatically determining,
2 based on said user-specified requirements, one or more prefabricated circuits for that
3 satisfy said user-specified functional requirements.

1 12. The method of Claim 11 further comprising the step delivering to said browser over
2 said network one or more web pages that identify said one or more prefabricated
3 circuits and that include at least one control which, when selected, initiates an

operation for placing an order over said network for at least one of said one or more prefabricated circuits.

13. The method of Claim 3 wherein:

the user-specified functional requirements include one or more input values; and the step of automatically determining components includes

applying one or more input values from said user-specified functional requirements to a formula to determine one or more required parameter values, and determining said components based on said one or more required parameter values.

14. The method of Claim 2 further comprising the steps of:

providing data that identifies said components and said topology to a schematic design generation module; and delivering to said browser, based on output from said schematic design generation module, one or more web pages that display a schematic design of said circuit that includes said components arranged according to said design.

15. The method of Claim 14 wherein:

the user-specified functional requirements include one or more input values; and the step of automatically determining components includes

applying one or more input values from said user-specified functional requirements to a formula to determine one or more required parameter values, and determining said components based on said one or more required parameter values.

1 16. The method of Claim 14 wherein the browser is operated by a particular user, the
2 method further comprising the steps of:
3 storing, on server-side storage, design data that specifies the design of said circuit and
4 data that associates the design data with said user; and
5 delivering to said browser a web page that identifies a set of previously saved designs
6 associated with said user, said previously saved designs including the design
7 of said circuit; and
8 in response to user input at said browser, delivering to said browser a web page that
9 includes a schematic diagram generated based on the design data stored on
10 said server-side storage.

1 17. The method of Claim 16 further comprising the steps of:
2 in response to user input at said browser that indicates that said design is to be shared
3 with a second user, storing data that associates the design data with said
4 second user;
5 delivering to a second browser operated by said second user a web page that identifies
6 a set of previously saved designs associated with said second user, said
7 previously save designs including the design of said circuit; and
8 in response to user input at said second browser, delivering to said second browser a
9 web page that includes a schematic diagram generated based on the design
10 data stored on said server-side.

1 18. The method of Claim 14 wherein:
2 the step of automatically determining components includes determining components
3 that have specific operational values;
4 the step of providing data that identifies said components includes providing data that
5 identifies components with said specific operational values; and

6 the step of delivering one or more web pages that display a schematic design of said
7 circuit includes delivering to said browser a web page that displays an
8 arrangement of said components with said specific operational values.

1 19. A computer-readable medium carrying instructions for designing a circuit that
2 satisfies user-specified functional requirements, the instructions including instructions
3 for performing the steps of:
4 receiving said user-specified functional requirements over a network from a client;
5 automatically determining, based on said user-specified requirements, components
6 and a topology for constructing said circuit;
7 wherein the step of determining components includes determining components that
8 have operational values such that, when said components are arranged
9 according to said topology to form said circuit, the circuit satisfies said user-
10 specified functional requirements; and
11 delivering to said client over said network component information that identifies said
12 components.

20. The computer-readable medium of Claim 19 wherein:
1 the client is executing a browser; and
2 the step of delivering said component information includes delivering to said browser
3 one or more web pages that identify said components.

1 21. The computer-readable medium of Claim 20 wherein the step of delivering includes
2 delivering one or more web pages that identify said components and that include at
3 least one control which, when selected, initiates an operation for placing an order
4 over said network for at least one of said components.

1 22. The computer-readable medium of Claim 21 wherein the step of
2 automatically determining components includes the steps of:

3 automatically determining, based on said user-specified requirements, a plurality of
4 suggested components, each of which may be used to design a circuit that
5 satisfies said user-specified functional requirements;
6 delivering to said browser over said network one or more suggested component web
7 pages that identify said plurality of suggested components;
8 in response to selection of a suggested component of said plurality of suggested
9 components identified in said one or more suggested component web pages,
10 receiving from said browser over said network a message that identifies the
11 selected suggested component; and
12 automatically determining, based on said user-specified requirements and said
13 selected suggested component, components for constructing a circuit that
14 includes said selected suggested component and that satisfies said user-
15 specified functional requirements.

1 23. The computer-readable medium of Claim 22 wherein the step of delivering to said
2 browser over said network one or more suggested component web pages includes
3 delivering one or more suggested component web pages that specify, for each
4 suggested component of said plurality of suggested components, a price value.

1 24. The computer-readable medium of Claim 22 wherein the step of delivering to said
2 browser over said network one or more suggested component web pages includes
3 delivering one or more suggested component web pages that specify, for each
4 suggested component of said plurality of suggested components, a component
5 identifier and one or more operating values.

1 25. The computer-readable medium of Claim 21 further comprising instructions for
2 performing the steps of:

determining a set of alternative components for a particular component of said components, wherein each alternative component in said set of alternative components may be used in said circuit in place of a particular component; delivering to said browser over said network one or more web pages that identify said components and that include a control that is associated said particular component; in response to selection of said control, displaying on said browser said set of alternative components; and in response to selection of one of said alternative components, updating said design to include said selected alternative component in place of said particular component.

26. The computer-readable medium of Claim 21 wherein said operation for placing an order is an operation for placing an order for a kit that includes a plurality of said components.

27. The computer-readable medium of Claim 26 wherein said operation for placing an order is an operation for placing an order for a kit that includes all of said components.

28. The computer-readable medium of Claim 21 wherein said operation for placing an order is an operation for placing an order with another party for the other party to construct a said circuit.

29. The computer-readable medium of Claim 21 further comprising instructions for performing the step of automatically determining, based on said user-specified requirements, one or more prefabricated circuits for that satisfy said user-specified functional requirements.

1 30. The computer-readable medium of Claim 29 further comprising instructions for
 2 performing the step delivering to said browser over said network one or more web
 3 pages that identify said one or more prefabricated circuits and that include at least one
 4 control which, when selected, initiates an operation for placing an order over said
 5 network for at least one of said one or more prefabricated circuits.

1 31. The computer-readable medium of Claim 21 wherein:
 2 the user-specified functional requirements include one or more input values; and
 3 the step of automatically determining components includes
 4 applying one or more input values from said user-specified functional
 5 requirements to a formula to determine one or more required
 6 parameter values, and
 7 determining said components based on said one or more required parameter
 8 values.

1 32. The computer-readable medium of Claim 20 further comprising the steps of:
 2 providing data that identifies said components and said topology to a schematic
 3 design generation module; and
 4 delivering to said browser, based on output from said schematic design generation
 5 module, one or more web pages that display a schematic design of said circuit
 6 that includes said components arranged according to said design.

1 33. The computer-readable medium of Claim 32 wherein:
 2 the user-specified functional requirements include one or more input values; and
 3 the step of automatically determining components includes
 4 applying one or more input values from said user-specified functional
 5 requirements to a formula to determine one or more required
 6 parameter values, and

2 the step of automatically determining components includes determining components
3 that have specific operational values;
4 the step of providing data that identifies said components includes providing data that
5 identifies components with said specific operational values; and
6 the step of delivering one or more web pages that display a schematic design of said
7 circuit includes delivering to said browser a web page that displays an
8 arrangement of said components with said specific operational values.

12421-0030

ABSTRACT OF THE DISCLOSURE

Techniques are provided for designing a circuit that satisfies user-specified functional requirements without the user having to obtain additional education or possess specialized software. According to one embodiment, user-specified functional requirements are received
5 over a network from a client executing a browser. The network may be, for example, the Internet. Based on the user-specified requirements, components and a topology for constructing the circuit are automatically determined. The components determined during this operation have operational values such that, when the components are arranged according to the topology to form the circuit, the circuit satisfies the user-specified functional
10 requirements. One or more web pages that identify the components are then delivered to the browser over the network. According to one aspect of the invention, the component and topology information is used to generate a schematic diagram that is delivered in a web page to the user over the network. According to another aspect of the invention, the user is provided with a web page that has a control which, when selected, initiates an operation for
15 placing an order over said network for one of the components, a kit of all of the components, a custom made circuit made from the components, and/or a prefabricated circuit that is functionally similar to the one that was designed.

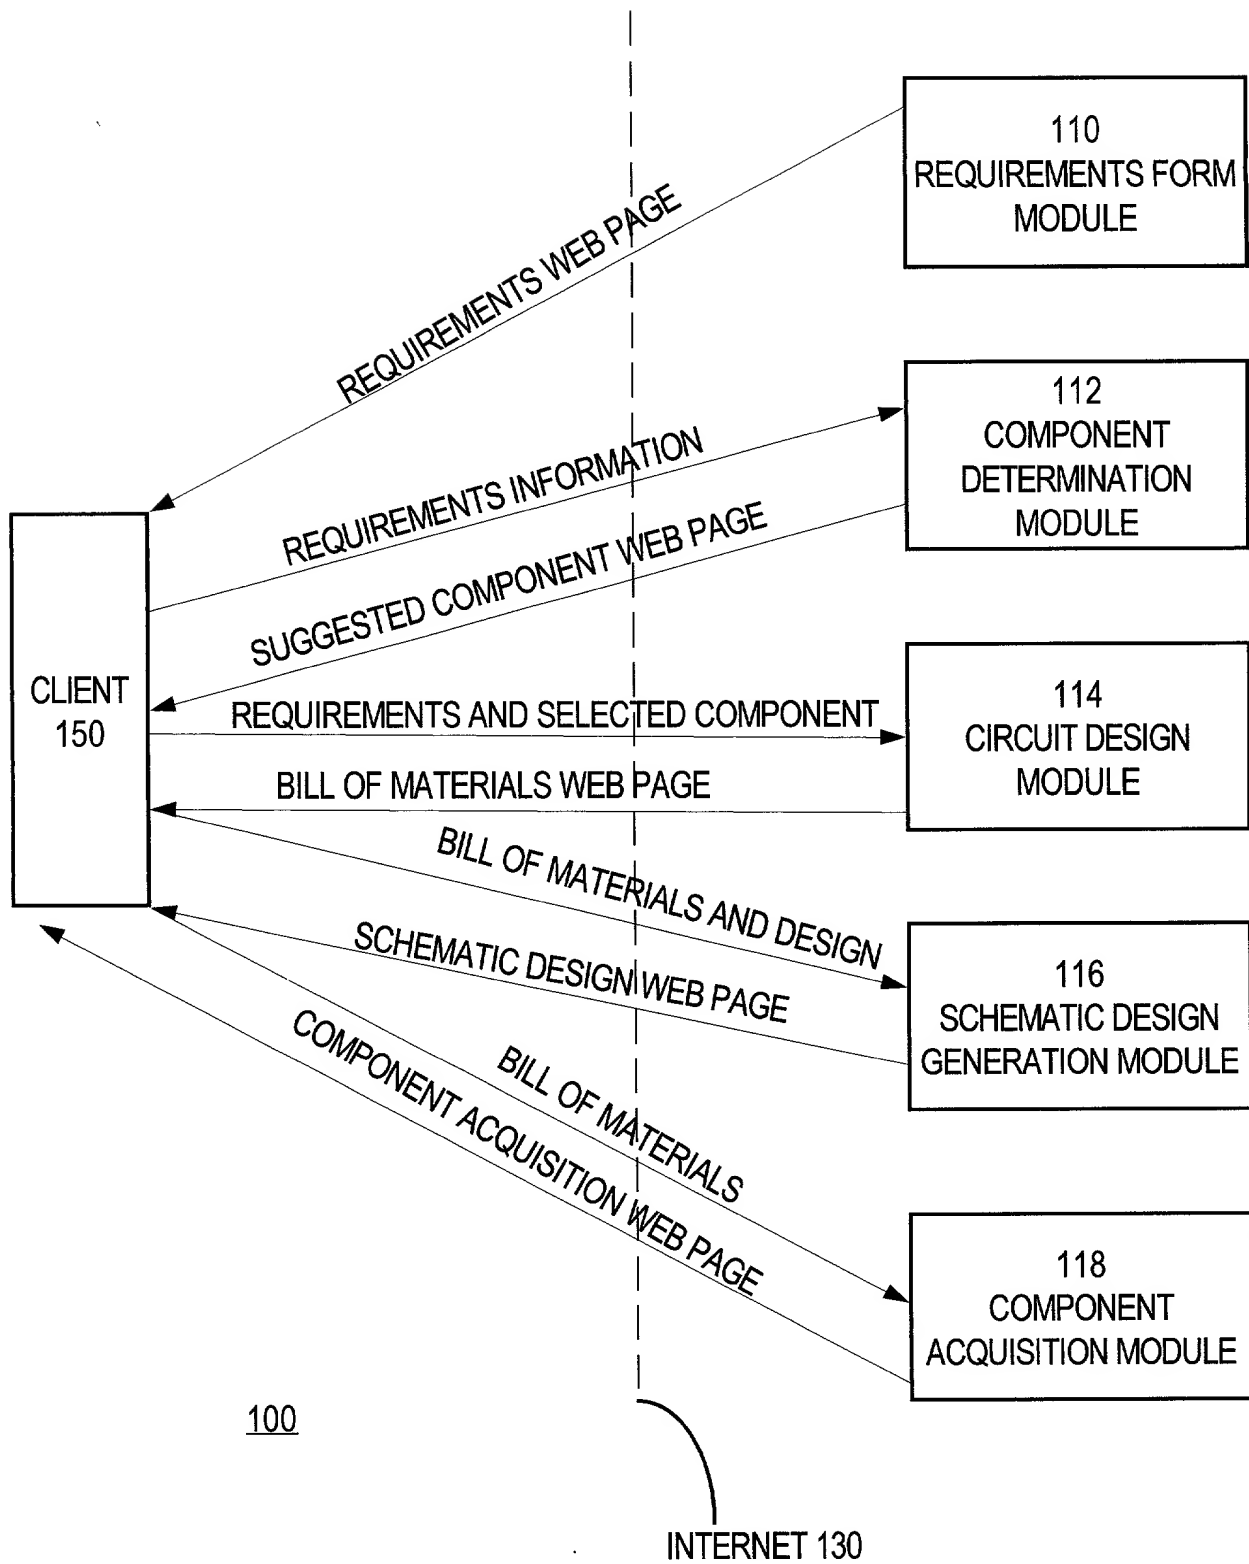


FIG. 1



MyWebench

My Webench ORGANIZES YOUR DESIGNS WITH SECURE PASSWORD PROTECTED STORAGE. DESIGN DETAILS INCLUDE YOUR SPECIFICATIONS, BILL OF MATERIAL, SCHEMATIC, SIMULATIONS AND ON LINE ORDERING OF PARTS AND DEMO BOARDS.

You currently have no stored designs.

SELECT ONE OF THE **Design Assistants** TO START A NEW DESIGN.

Webench Tools

ASSISTANTS SAVE YOUR TIME!

LET OUR **Design Assistants** GUIDE YOU THROUGH EACH STEP. YOU CAN CHOOSE FROM EITHER THE

- POWER SUPPLY DESIGN ASSISTANT

~204

OR

- WIRELESS EASYPLL DESIGN ASSISTANT.

~206

THE ASSISTANT WILL WALK YOU THROUGH EACH OF THE STEPS. YOU CAN CHOOSE WHEN TO STOP AS YOU CAN ALWAYS RETURN LATER TO FINISH ANOTHER STEP.

VISIT THESE PORTALS HAVING WEBENCH TOOLS;

- POWER.NATIONAL.COM FEATURING WEBSIM™

- WIRELESS.NATIONAL.COM FEATURING EASYPLL

Using Webench Tools

FOUR EASY STEPS AND YOU'RE DONE!

1 Choose a Part

INPUT YOUR SYSTEM SPECIFICATIONS AND YOU WILL FIND THOSE DEVICES THAT FIT.

2 Create a Design

A DESIGN WILL BE CREATED FOR YOU INCLUDING ANY NECESSARY PASSIVE COMPONENTS AND IMPORTANT CALCULATED OPERATING VALUES.

3 Analyze a Design


USE A VARIETY OF SIMULATION TESTS TO VALIDATE YOUR DESIGN.

4 Build It!

BUY A PART, KIT OF PARTS, EVALUATION BOARD.

202

FIG. 2

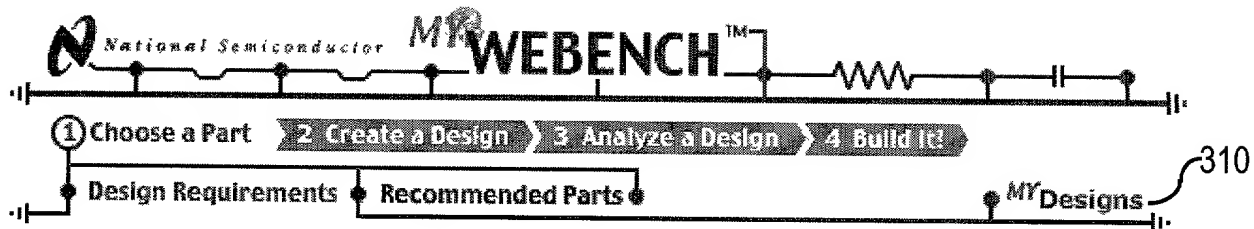

Enter your power supply design requirements.

Basic Selections

VIN MIN V
VIN MAX V } 302

Output Voltage
Output #1 V out I out } 304


Choose Additional features (Optional)

306 {
ON/OFF PIN ☐ NO ☐ YES ☒ IGNORE
ERROR FLAG ☐ NO ☐ YES ☒ IGNORE
SYNC PIN ☐ NO ☐ YES ☒ IGNORE

V out I out
OUTPUT 2 V A
OUTPUT 3 V A

308

FIG. 3

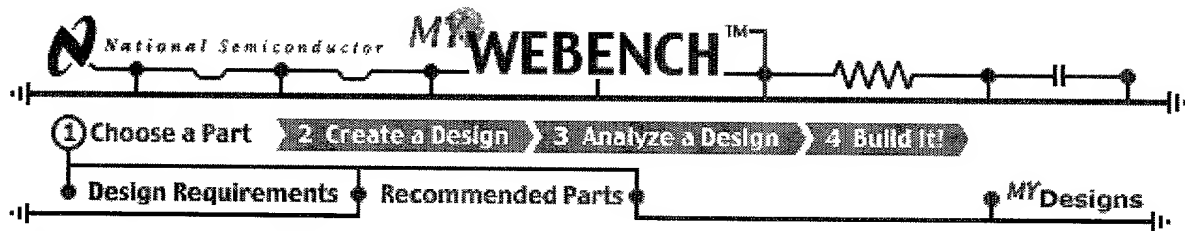

Your Design Specifications

| | |
|---------------|------------|
| VINMIN: 14.0V | Output #1 |
| VINMAX: 22.0V | VOUT= 3.3V |
| | IOUT= 1.0A |

Suggested Switching Regulators - Buck Topology

| Product Folder | Webench Tools | Max Curr. | Typ. Eff. | On/Off | Err. Pin | Other Features | Freq. kHz | Est. Price |
|----------------|------------------------------------|-----------|-----------|--------|----------|--|-----------|------------|
| LM2575-3.3 | Create Design SEE CC NOTE BELOW | 1.0A | 75% | Y | N | | 52 | \$1.72 |
| LM2575-ADJ | Create Design SEE CC NOTE BELOW | 1.0A | 75% | Y | N | ADJ. VOUT | 52 | \$2.15 |
| LM2575HV-3.3 | Create Design SEE CC NOTE BELOW | 1.0A | 75% | Y | N | | 52 | \$2.15 |
| LM2575HIV-ADJ | Create Design SEE CC NOTE BELOW | 1.0A | 75% | Y | N | ADJ. VOUT | 52 | \$2.15 |
| LM2576-3.3 | Create Design SEE CC NOTE BELOW | 3.0A | 75% | Y | N | | 52 | \$2.40 |
| LM2576-ADJ | Create Design SEE CC NOTE BELOW | 3.0A | 75% | Y | N | ADJ. VOUT | 52 | \$2.40 |
| LM2576HV-3.3 | Create Design SEE CC NOTE BELOW | 3.0A | 75% | Y | N | | 52 | \$2.98 |
| LM2576HIV-ADJ | Create Design SEE CC NOTE BELOW | 3.0A | 75% | Y | N | ADJ. VOUT | 52 | \$2.98 |
| LM2595-3.3 | Create Design | 1.0A | 78% | Y | N | | 150 | \$1.86 |
| LM2595-ADJ | Create Design | 1.0A | 78% | Y | N | ADJ. VOUT | 150 | \$1.86 |
| LM2596-3.3 | Create Design | 3.0A | 73% | Y | N | | 150 | \$2.61 |
| LM2596-ADJ | Create Design | 3.0A | 73% | Y | N | ADJ. VOUT | 150 | \$2.61 |
| LM2598-3.3 | Create Design | 1.0A | 78% | Y | Y | SOFTSTART | 150 | \$2.18 |
| LM2598-ADJ | Create Design | 1.0A | 78% | Y | Y | SOFTSTART, ADJ. VOUT | 150 | \$2.18 |
| LM2599-3.3 | Create Design | 3.0A | 73% | Y | Y | SOFTSTART | 150 | \$2.91 |
| LM2599-ADJ | Create Design | 3.0A | 73% | Y | Y | SOFTSTART, ADJ. VOUT | 150 | \$2.91 |
| LM2630 | Create Design SEE CC NOTE BELOW | 8.0A | 94% | Y | Y | SYNC, SOFTSTART, ADJ. PEAK CURRENT LIMIT | 200 | \$2.75 |
| LM2631 | Create Design SEE CC NOTE BELOW | 8.0A | 94% | Y | Y | SYNC, SOFTSTART, ADJ. PEAK CURRENT LIMIT | 200 | \$2.75 |
| LM2670-3.3 | Create Design SEE CC NOTE BELOW | 3.0A | 86% | Y | N | SYNC, SOFTSTART | 260 | \$2.63 |

FIG. 4

Product Folder

LM2575

SIMPLE SWITCHER 1A Step-Down Voltage Regulator

See Also: LM2595 - low cost & more efficient

502 { LM2598 - upgrade
LM2672 - upgrade
LM2675 - upgrade

GENERIC P/N 2575

Contents

- GENERAL DESCRIPTION
- FEATURES
- APPLICATIONS
- DATASHEET
- PACKAGE AVAILABILITY, MODELS, SAMPLES & PRICING
- DESIGN TOOLS
- APPLICATION NOTES

504

| Parametric Table | |
|--------------------------------|-------------------|
| MULTIPLE OUTPUT CAPABILITY | NO |
| ON/OFF PIN | YES |
| ERROR FLAG | NO |
| INPUT VOLTAGE, MIN (VOLT) | 4 |
| INPUT VOLTAGE, MAX (VOLT) | 40 |
| OUTPUT CURRENT, MAX | 1 AMP |
| OUTPUT VOLTAGE (VOLT) | 12,15,3.30,5,1.20 |
| ADJUSTABLE OUTPUT VOLTAGE | NO,YES |
| SWITCHING FREQUENCY (HZ) | 52000 |
| ADJUSTABLE SWITCHING FREQUENCY | NO |
| SYNC PIN | NO |
| EFFICIENCY (%) | 88,75,77 |
| INVERTING | YES |
| STEP-DOWN | YES |

General Description

General Description

The LM2575 series of regulators are monolithic integrated circuits that provide all the active functions for a step-down (buck) switching regulator, capable of driving a 1A load with excellent line and load regulation. These devices are available in fixed output voltages of 3.3V, 5V, 12V, 15V, and an adjustable output version.

Requiring a minimum number of external components, these regulators are simple to use and include internal frequency compensation and a fixed -frequency oscillator.

The LM2575 series offers a high-efficiency replacement for popular three-terminal linear regulators. It substantially reduces the size of the heat sink, and in many cases no heat sink is required.

A standard series of inductors optimized for use with the LM2575 are available from several different manufacturers. This feature greatly simplifies the design of switch - mode power supplies.

Other features include a guaranteed $\pm 4\%$ tolerance on output voltage within specified input voltages and output load conditions, and $\pm 10\%$ on the oscillator frequency. External shutdown is included, featuring 50 μA (typical) standby current. The output switch includes cycle-by-cycle current limiting, as well as thermal shutdown for full protection under fault conditions.

FIG. 5B

| Run | Time | Pressure | Temperature | Flow Rate | Concentration | Viscosity | Refractive Index | Density | Surface Tension | Interfacial Tension | Wettability | Adhesion | Coagulation | Stability | Notes |
|-----|-------|----------|-------------|-----------|---------------|-----------|------------------|---------|-----------------|---------------------|-------------|----------|-------------|-----------|--------------------|
| 1 | 10:00 | 101.3 | 25.0 | 1.0 | 0.1 | 0.01 | 1.33 | 1.00 | 0.05 | 0.02 | 0.01 | 0.01 | 0.01 | 0.01 | Initial conditions |
| 2 | 10:05 | 101.3 | 25.0 | 1.0 | 0.1 | 0.01 | 1.33 | 1.00 | 0.05 | 0.02 | 0.01 | 0.01 | 0.01 | Stable | |
| 3 | 10:10 | 101.3 | 25.0 | 1.0 | 0.1 | 0.01 | 1.33 | 1.00 | 0.05 | 0.02 | 0.01 | 0.01 | 0.01 | Stable | |
| 4 | 10:15 | 101.3 | 25.0 | 1.0 | 0.1 | 0.01 | 1.33 | 1.00 | 0.05 | 0.02 | 0.01 | 0.01 | 0.01 | Stable | |
| 5 | 10:20 | 101.3 | 25.0 | 1.0 | 0.1 | 0.01 | 1.33 | 1.00 | 0.05 | 0.02 | 0.01 | 0.01 | 0.01 | Stable | |
| 6 | 10:25 | 101.3 | 25.0 | 1.0 | 0.1 | 0.01 | 1.33 | 1.00 | 0.05 | 0.02 | 0.01 | 0.01 | 0.01 | Stable | |
| 7 | 10:30 | 101.3 | 25.0 | 1.0 | 0.1 | 0.01 | 1.33 | 1.00 | 0.05 | 0.02 | 0.01 | 0.01 | 0.01 | Stable | |
| 8 | 10:35 | 101.3 | 25.0 | 1.0 | 0.1 | 0.01 | 1.33 | 1.00 | 0.05 | 0.02 | 0.01 | 0.01 | 0.01 | Stable | |
| 9 | 10:40 | 101.3 | 25.0 | 1.0 | 0.1 | 0.01 | 1.33 | 1.00 | 0.05 | 0.02 | 0.01 | 0.01 | 0.01 | Stable | |
| 10 | 10:45 | 101.3 | 25.0 | 1.0 | 0.1 | 0.01 | 1.33 | 1.00 | 0.05 | 0.02 | 0.01 | 0.01 | 0.01 | Stable | |
| 11 | 10:50 | 101.3 | 25.0 | 1.0 | 0.1 | 0.01 | 1.33 | 1.00 | 0.05 | 0.02 | 0.01 | 0.01 | 0.01 | Stable | |
| 12 | 10:55 | 101.3 | 25.0 | 1.0 | 0.1 | 0.01 | 1.33 | 1.00 | 0.05 | 0.02 | 0.01 | 0.01 | 0.01 | Stable | |
| 13 | 11:00 | 101.3 | 25.0 | 1.0 | 0.1 | 0.01 | 1.33 | 1.00 | 0.05 | 0.02 | 0.01 | 0.01 | 0.01 | Stable | |
| 14 | 11:05 | 101.3 | 25.0 | 1.0 | 0.1 | 0.01 | 1.33 | 1.00 | 0.05 | 0.02 | 0.01 | 0.01 | 0.01 | Stable | |
| 15 | 11:10 | 101.3 | 25.0 | 1.0 | 0.1 | 0.01 | 1.33 | 1.00 | 0.05 | 0.02 | 0.01 | 0.01 | 0.01 | Stable | |
| 16 | 11:15 | 101.3 | 25.0 | 1.0 | 0.1 | 0.01 | 1.33 | 1.00 | 0.05 | 0.02 | 0.01 | 0.01 | 0.01 | Stable | |
| 17 | 11:20 | 101.3 | 25.0 | 1.0 | 0.1 | 0.01 | 1.33 | 1.00 | 0.05 | 0.02 | 0.01 | 0.01 | 0.01 | Stable | |
| 18 | 11:25 | 101.3 | 25.0 | 1.0 | 0.1 | 0.01 | 1.33 | 1.00 | 0.05 | 0.02 | 0.01 | 0.01 | 0.01 | Stable | |
| 19 | 11:30 | 101.3 | 25.0 | 1.0 | 0.1 | 0.01 | 1.33 | 1.00 | 0.05 | 0.02 | 0.01 | 0.01 | 0.01 | Stable | |
| 20 | 11:35 | 101.3 | 25.0 | 1.0 | 0.1 | 0.01 | 1.33 | 1.00 | 0.05 | 0.02 | 0.01 | 0.01 | 0.01 | Stable | |
| 21 | 11:40 | 101.3 | 25.0 | 1.0 | 0.1 | 0.01 | 1.33 | 1.00 | 0.05 | 0.02 | 0.01 | 0.01 | 0.01 | Stable | |
| 22 | 11:45 | 101.3 | 25.0 | 1.0 | 0.1 | 0.01 | 1.33 | 1.00 | 0.05 | 0.02 | 0.01 | 0.01 | 0.01 | Stable | |
| 23 | 11:50 | 101.3 | 25.0 | 1.0 | 0.1 | 0.01 | 1.33 | 1.00 | 0.05 | 0.02 | 0.01 | 0.01 | 0.01 | Stable | |
| 24 | 11:55 | 101.3 | 25.0 | 1.0 | 0.1 | 0.01 | 1.33 | 1.00 | 0.05 | 0.02 | 0.01 | 0.01 | 0.01 | Stable | |
| 25 | 12:00 | 101.3 | 25.0 | 1.0 | 0.1 | 0.01 | 1.33 | 1.00 | 0.05 | 0.02 | 0.01 | 0.01 | 0.01 | Stable | |

- ## Applications

- # Datasheet

FIG. 5C





Package Availability, Models, Samples & Pricing

| Part Number | Package | | Status | Models | | Samples & Electronic Orders | Budgetary Pricing | | Std Pack Size | Package Marking |
|--------------|-----------|--------|-----------------|--------|------|-----------------------------|-------------------|-----------|---------------|----------------------|
| | Type | # pins | | SPICE | IBIS | | Quantity | \$US each | | |
| LM2575M-12 | SOIC WIDE | 24 | Full production | N/A | N/A | Samples | 1K+ | \$1.7200 | tube of 30 | [logo]LM2575M-12 P+ |
| LM2575M-15 | SOIC WIDE | 24 | Full production | N/A | N/A | Samples | 1K+ | \$1.7200 | tube of 30 | [logo]LM2575M-15 P+ |
| LM2575M-3.3 | SOIC WIDE | 24 | Full production | N/A | N/A | Samples Order Parts | 1K+ | \$1.7200 | tube of 30 | [logo]LM2575M-3.3 P+ |
| LM2575M-5.0 | SOIC WIDE | 24 | Full production | N/A | N/A | Samples Order Parts | 1K+ | \$1.7200 | tube of 30 | [logo]LM2575M-5.0 P+ |
| LM2575M-ADJ | SOIC WIDE | 24 | Full production | N/A | N/A | Samples Order Parts | 1K+ | \$1.7200 | tube of 30 | [logo]LM2575M-ADJ P+ |
| LM2575MX-12 | SOIC WIDE | 24 | Full production | N/A | N/A | Order Parts | 1K+ | \$1.7500 | reel of 1000 | [logo]LM2575M-12 P+ |
| LM2575MX-15 | SOIC WIDE | 24 | Full production | N/A | N/A | . | 1K+ | \$1.7500 | reel of 1000 | [logo]LM2575M-15 P+ |
| LM2575MX-3.3 | SOIC WIDE | 24 | Full production | N/A | N/A | . | 1K+ | \$1.7500 | reel of 1000 | [logo]LM2575M-3.3 P+ |
| LM2575MX-5.0 | SOIC WIDE | 24 | Full production | N/A | N/A | Order Parts | 1K+ | \$1.7500 | reel of 1000 | [logo]LM2575M-5.0 P+ |
| LM2575MX-ADJ | SOIC WIDE | 24 | Full production | N/A | N/A | Order Parts | 1K+ | \$1.7500 | reel of 1000 | [logo]LM2575M-ADJ P+ |
| LM2575N-12 | MDIP | 16 | Full production | N/A | N/A | Samples | 1K+ | \$1.7200 | tube of | [logo]LM2575N |

FIG. 5D

| | | | | | | | | | | |
|-------------|---------------|----|-----------------|-----|-----|--|-----|----------|------------|----------------------|
| LM2575N-12 | <u>MDIP</u> | 16 | Full production | N/A | N/A | Samples Order Parts | 1K+ | \$1.7200 | tube of 20 | [logo]LM2575N-12 P+ |
| LM2575N-15 | <u>MDIP</u> | 16 | Full production | N/A | N/A | Samples Order Parts | 1K+ | \$1.7200 | tube of 20 | [logo]LM2575N-15 P+ |
| LM2575N-5.0 | <u>MDIP</u> | 16 | Full production | N/A | N/A | Samples Order Parts | 1K+ | \$1.7200 | tube of 20 | [logo]LM2575N-5.0 P+ |
| LM2575N-ADJ | <u>MDIP</u> | 16 | Full production | N/A | N/A | Samples Order Parts | 1K+ | \$1.7200 | tube of 20 | [logo]LM2575N-ADJ P+ |
| LM2575T-12 | <u>TO-220</u> | 5 | Full production | N/A | N/A | Samples Order Parts | 1K+ | \$1.4300 | tube of 45 | [logo]LM2575T-12 P+ |
| LM2575T-15 | <u>TO-220</u> | 5 | Full production | N/A | N/A | Samples Order Parts | 1K+ | \$1.4300 | tube of 45 | [logo]LM2575T-15 P+ |
| LM2575T-3.3 | <u>TO-220</u> | 5 | Full production | N/A | N/A | Samples Order Parts | 1K+ | \$1.4300 | tube of 45 | [logo]LM2575T-3.3 P+ |
| LM2575T-5.0 | <u>TO-220</u> | 5 | Full production | N/A | N/A | Samples Order Parts | 1K+ | \$1.4300 | tube of 45 | [logo]LM2575T-5.0 P+ |
| LM2575T-ADJ | <u>TO-220</u> | 5 | Full production | N/A | N/A | Samples Order Parts | 1K+ | \$1.4300 | tube of 45 | [logo]LM2575T-ADJ P+ |
| LM2575S-12 | <u>TO 263</u> | 5 | Full production | N/A | N/A | Samples Order Parts | 1K+ | \$1.4300 | tube of 45 | [logo]LM2575S-12 P+ |
| LM2575S-15 | <u>TO 263</u> | 5 | Full production | N/A | N/A | Samples Order Parts | 1K+ | \$1.4300 | tube of 45 | [logo]LM2575S-15 P+ |
| LM2575S-3.3 | <u>TO 263</u> | 5 | Full production | N/A | N/A | Samples Order Parts | 1K+ | \$1.4300 | tube of 45 | [logo]LM2575S-3.3 P+ |
| LM2575S- | <u>TO</u> | 5 | Full | N/A | N/A | Samples Order Parts | 1K+ | \$1.4300 | tube | [logo]LM2575S |

FIG. 5E

| | | | | | | | | | | |
|----------------|-----------|---|--------------------|-----|-----|---|-----|----------|-------------------|--------------------------|
| LM2575S-ADJ | TO 263 | 5 | Full production | N/A | N/A |  | 1K+ | \$1.4300 | tube of 45 | [logo]LM2575S -ADJ P+ |
| LM2575SX-12 | TO 263 | 5 | Full production | N/A | N/A | . | 1K+ | \$1.4800 | reel of 500 | [logo]LM2575S -12 P+ |
| LM2575SX-15 | TO 263 | 5 | Full production | N/A | N/A | . | 1K+ | \$1.4800 | reel of 500 | [logo]LM2575S -15 P+ |
| LM2575SX-3.3 | TO 263 | 5 | Full production | N/A | N/A |  | 1K+ | \$1.4800 | reel of 500 | [logo]LM2575S -3.3 P+ |
| LM2575SX-5.0 | TO 263 | 5 | Full production | N/A | N/A |  | 1K+ | \$1.4800 | reel of 500 | [logo]LM2575S -5.0 P+ |
| LM2575SX-ADJ | TO 263 | 5 | Full production | N/A | N/A |  | 1K+ | \$1.4800 | reel of 500 | [logo]LM2575S -ADJ P+ |
| LM2575-ADJ MDC | die | | Full production | N/A | N/A | . | | | N/A | - |

Design Tools







| Title | Size (in Kbytes) | Date |  View Online |  Download |  Receive via Email |
|---|------------------------|----------------|--|---|--|
| SimpleSwitcher® DC-DC Converters Design Software | 14 Kbytes | 1-Nov- 2000 | | View | |

FIG. 5F

Application Notes

| Title | Size (in Kbytes) | Date |  View Online |  Download |  Receive via Email |
|--|------------------------|----------|--|---|--|
| AN-1061: AN-1061 Power Conversion in Line-Powered Equipment | 142 Kbytes | 5-Jan-97 | View Online | Download | Receive via Email |
| AN-776: Application Note 776 20 Watt Simple Switcher Forward Converter | 387 Kbytes | 1-May-98 | View Online | Download | Receive via Email |

Please use [Adobe Acrobat](#) to view PDF file(s).
If you have trouble printing, see [Printing Problems](#).

[Information as of 6-Nov-2000]

Quick Search

[Parametric Search](#)

[System Diagrams](#)

[Product Tree](#)

[Home](#)

[About Languages](#) . [About the Site](#) . [About "Cookies"](#)


National is [QS 9000 Certified](#) . [Privacy/Security](#)

[Copyright © National Semiconductor Corporation](#)

 [Preferences](#) . [Feedback](#)


FIG. 5G

0203040506070809101112131415161718192021222324252627282930313233343536373839404142434445464748495051525354555657585960616263646566676869707172737475767778798081828384858687888990919293949596979899100

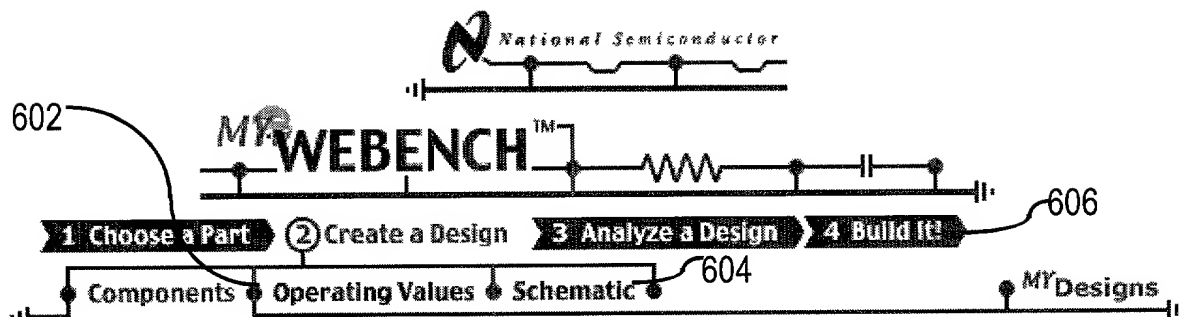


| | | | | | |
|----------------------------|---------|--------------------|--------|--------------|---|
| DESIGN: DESIGN#6 | | AUG 30 2000 4:23PM | | ID: 229899_6 | CHOOSE OPERATION DELETE , COPY RENAME , ADD NOTES PRINT XML |
| DEVICE: LM2672 | | | | | |
| Design Requirements | | OUTPUT | #1 | | |
| VINMIN = | 14.00 V | VOUT= | 3.30 V | | |
| VINMAX = | 22.00 V | IOUT= | 1.00 A | | |

| COMPONENTS | | | | |
|------------|------------------------|-----------------|-----------------------|-----------------------|
| Part | Manufacturer | Part# | Attributes | |
| CB | AVX | 08055C103KAT | 0.010000 UF | Select Alternate Part |
| CIN | NICHICON | UPL1V121MPH | 120.00 UF,0.1400 OHMS | Select Alternate Part |
| COUT | VISHAY-SPRAGUE | 594D127X06R3C2T | 120.00 UF,0.0850 OHMS | Select Alternate Part |
| CSS | AVX | 08055C103KAT | 0.010000 UF | Select Alternate Part |
| D1 | GENERAL SEMICONDUCTOR | SS24 | 0.50 V | Select Alternate Part |
| IC | NATIONAL SEMICONDUCTOR | LM2672N-3.3 | 3.3,BUCK | Select Alternate Part |
| L1 | COILTRONICS | UP2T-330 | 33.000 UH,0.0790 OHMS | Select Alternate Part |

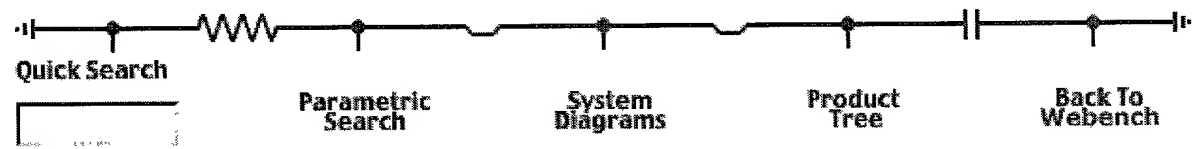

[About Languages](#) . [About the Site](#) . [About "Cookies"](#)
[National is QS 9000 Certified](#) . [Privacy/Security](#)
[Copyright © National Semiconductor Corporation](#)
[MY Preferences](#) . [Feedback](#)

FIG. 6



1 Choose a Part 2 Create a Design 3 Analyze a Design 4 Build It! 606

Components Operating Values Schematic 604

MY Designs

| | | | |
|---------------------|--------------------|--------------|-------------------|
| DESIGN: DESIGN#6 | AUG 30 2000 4:23PM | ID: 229899_6 | CHOOSE OPERATION |
| DEVICE: LM2672 | | | DELETE, COPY |
| Design Requirements | OUTPUT #1 | | RENAME, ADD NOTES |
| VINMIN = 14.00 V | VOUT= 3.30 V | | PRINT, XML |
| VINMAX = 22.00 V | IOUT= 1.00 A | | |

| OPERATING VALUES | | |
|------------------|--|----------------------|
| # | Description | Parameter Value |
| 1 | CONTINUOUS OR DISCONTINUOUS CONDUCTION MODE, INDUCTOR CURRENT GOES TO ZERO IN DISCONTINUOUS CONDUCTION | MODE CONT |
| 2 | TOTAL OUTPUT POWER | POUT 3.30 W |
| 3 | PULSE WIDTH MODULATION (PWM) FREQUENCY | FREQUENCY 260.00 KHZ |

| OPERATING POINT AT VIN= 22.00 V | | |
|---------------------------------|--|-----------------------|
| # | Description | Parameter Value |
| 1 | BODE PLOT PHASE MARGIN | PHASE MARG 97.68 DEG |
| 2 | BODE PLOT Crossover FREQUENCY, INDICATION OF BANDWIDTH OF SUPPLY | CROSS FREQ 48.98 KHZ |
| 3 | PEAK-TO-PEAK RIPPLE VOLTAGE | VOUT P-P 31.93 MV |
| 4 | IC JUNCTION TEMPERATURE | IC TJ 95.40 0C |
| 5 | IC JUNCTION TO AMBIENT THERMAL RESISTANCE | ICTHETAJA 100.21 0C/W |
| 6 | STEADY STATE EFFICIENCY | EFFICIENCY 81.17 % |
| 7 | STEADY STATE PWM DUTY CYCLE, RANGE LIMITS FROM 0 TO 100 | DUTY CYCLE 17.47 % |

| CURRENT ANALYSIS | | |
|------------------|---|--------------------|
| # | Description | Parameter Value |
| 1 | AVERAGE INPUT CURRENT | IIN AVG 0.45 A |
| 2 | PEAK CURRENT IN IC FOR STEADY STATE OPERATING POINT | IC IPK 1.19 A |
| 3 | INPUT CAPACITOR RMS RIPPLE CURRENT | CIN IRMS 0.20 A |
| 4 | INDUCTOR RIPPLE CURRENT, PEAK-TO-PEAK VALUE | L IPP 0.38 A |
| 5 | OUTPUT CAPACITOR RMS RIPPLE CURRENT | COUT IRMS 92.07 MA |
| 6 | ICS MAXIMUM RATED PEAK CURRENT | IC IPK MAX 1.30 A |

FIG. 7A

| Power Dissipation Analysis | | | |
|----------------------------|-----------------------------------|-----------|----------|
| # | Description | Parameter | Value |
| 1 | Diode Power Dissipation | Diode Pd | 0.41 W |
| 2 | Inductor Power Dissipation | L Pd | 79.00 mW |
| 3 | IC Power Dissipation | IC Pd | 0.25 W |
| 4 | Input Capacitor Power Dissipation | Cin Pd | 20.47 mW |



[About Languages](#) . [About the Site](#) . [About "Cookies"](#)
[National is QS 9000 Certified](#) . [Privacy/Security](#)
[Copyright © National Semiconductor Corporation](#)
[MY Preferences](#) . [Feedback](#)

FIG. 7B

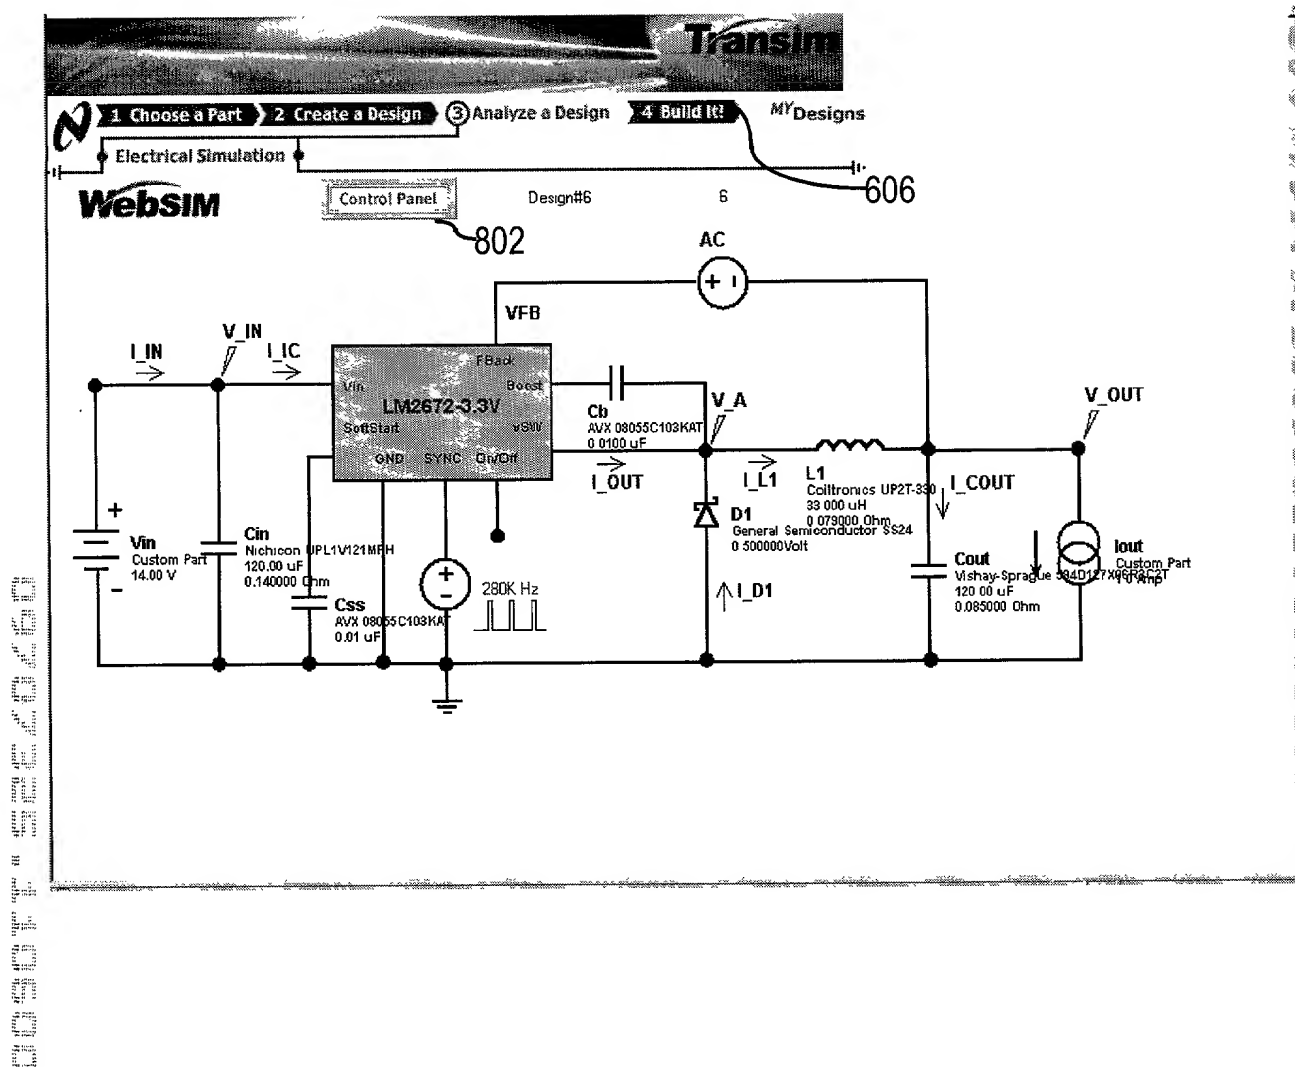


FIG. 8


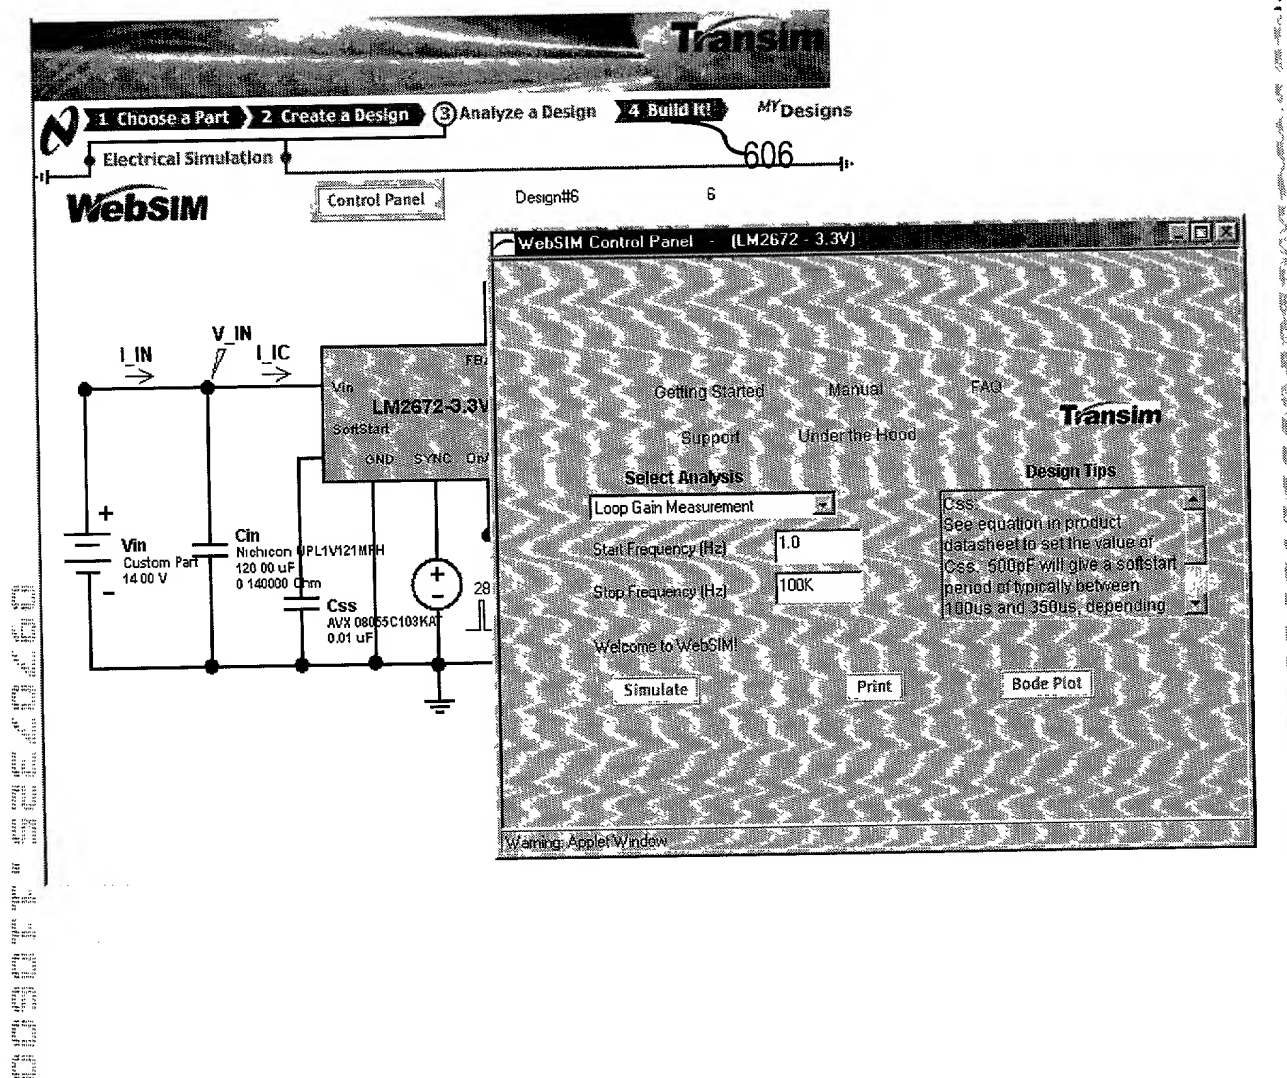


FIG. 9




1 Choose a Part 2 Create a Design 3 Analyze a Design 4 Build It!

Buy Parts, Demo Boards, & Resources

MY Designs


DESIGN ID : 6

| BILL OF MATERIALS | | | | | | |
|-------------------|---------------------------|-----------------|-----------------------------|----------------------------|-------------------|--------------------|
| Part | Manufacturer | Part# | Attributes | Price | Distributor | Order Parts |
| CB | AVX | 08055C103KAT | 0.010000 UF | \$ 0.02 | FUTURE- ACTIVE | - |
| D1 | GENERAL SEMICONDUCTOR | SS24 | 0.50 V | \$ 0.20 | FUTURE- ACTIVE | - |
| IC | NATIONAL SEMICONDUCTOR | LM2672N-3.3 | 3.3,BUCK,8- LEAD DIP | \$ 2.9000 (For Qty=100) | | Order Parts |
| L1 | COILTRONICS | UP2T-330 | 33.000 UH,0.0790 OHMS | PRICE NOT AVAILABLE | | - |
| CIN | NICHICON | UPL1V121MPH | 120.00 UF,0.1400 OHMS | \$.242 | AVNET | - |
| CSS | AVX | 08055C103KAT | 0.010000 UF | \$ 0.02 | FUTURE- ACTIVE | - |
| COUT | VISHAY- SPRAGUE | 594D127X06R3C2T | 120.00 UF,0.0850 OHMS | \$ 0.83 | FUTURE- ACTIVE | - |
| | | | | Total Price: 4.212 | ORDER KIT | |

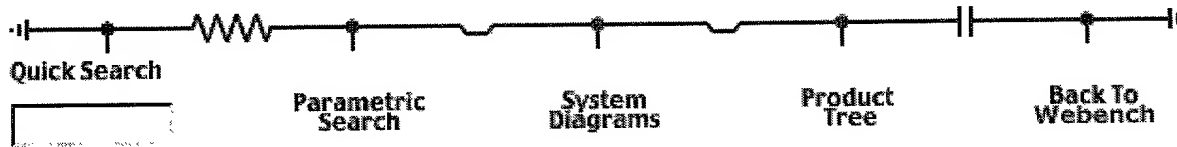


About Languages . About the Site . About "Cookies"
National is QS 9000 Certified . Privacy/Security
Copyright © National Semiconductor Corporation
MY Preferences . Feedback

FIG. 10

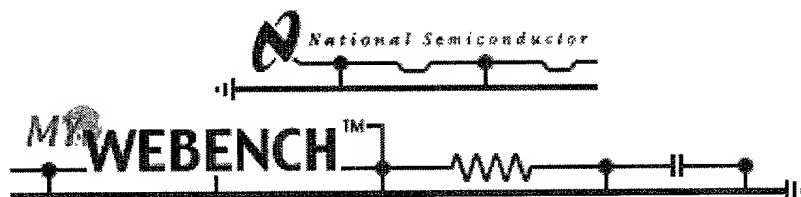

Brian Hickman - You have 6 designs stored in your personal workspace.


| ID | DesignName | Device | CreationDate | ModificationDate | Design Assistant | Comments | Design Operations |
|----|--------------------------|----------|-----------------------|------------------|------------------|----------|--|
| 6 | DESIGN#6 | LM2672 | AUG 30 2000 4:23PM | | POWER | | MODIFY, ANALYZE BUILD, DELETE, ADD NOTES |
| 5 | DESIGN#5 | LM2670 | AUG 30 2000 4:15PM | | POWER | | MODIFY, ANALYZE BUILD, DELETE, ADD NOTES |
| 4 | DESIGN#4 | LM2672 | AUG 30 2000 4:02PM | | POWER | | MODIFY, ANALYZE BUILD, DELETE, ADD NOTES |
| 3 | DESIGN#3 | LM2575HV | AUG 30 2000 4:01PM | | POWER | | MODIFY, ANALYZE BUILD, DELETE, ADD NOTES |
| 2 | DESIGN#2 | LM2575 | AUG 30 2000 3:30PM | | POWER | | MODIFY, ANALYZE BUILD, DELETE, ADD NOTES |
| 1 | DESIGN#1 | | AUG 30 2000 3:29PM | | POWER | | MODIFY, ANALYZE BUILD, DELETE, ADD NOTES |

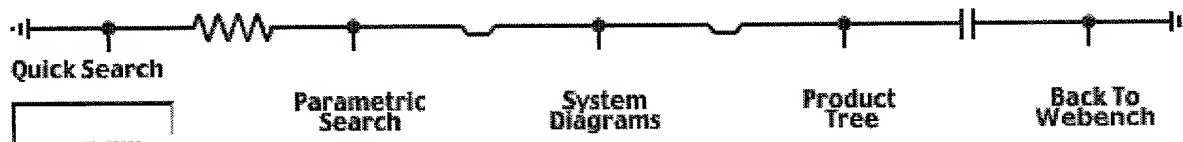

[About Languages](#) . [About the Site](#) . [About "Cookies"](#)
 National is **QS 9000 Certified** . [Privacy/Security](#)
 Copyright © National Semiconductor Corporation
[MY Preferences](#) . [Feedback](#)

FIG. 11

FIG. 12

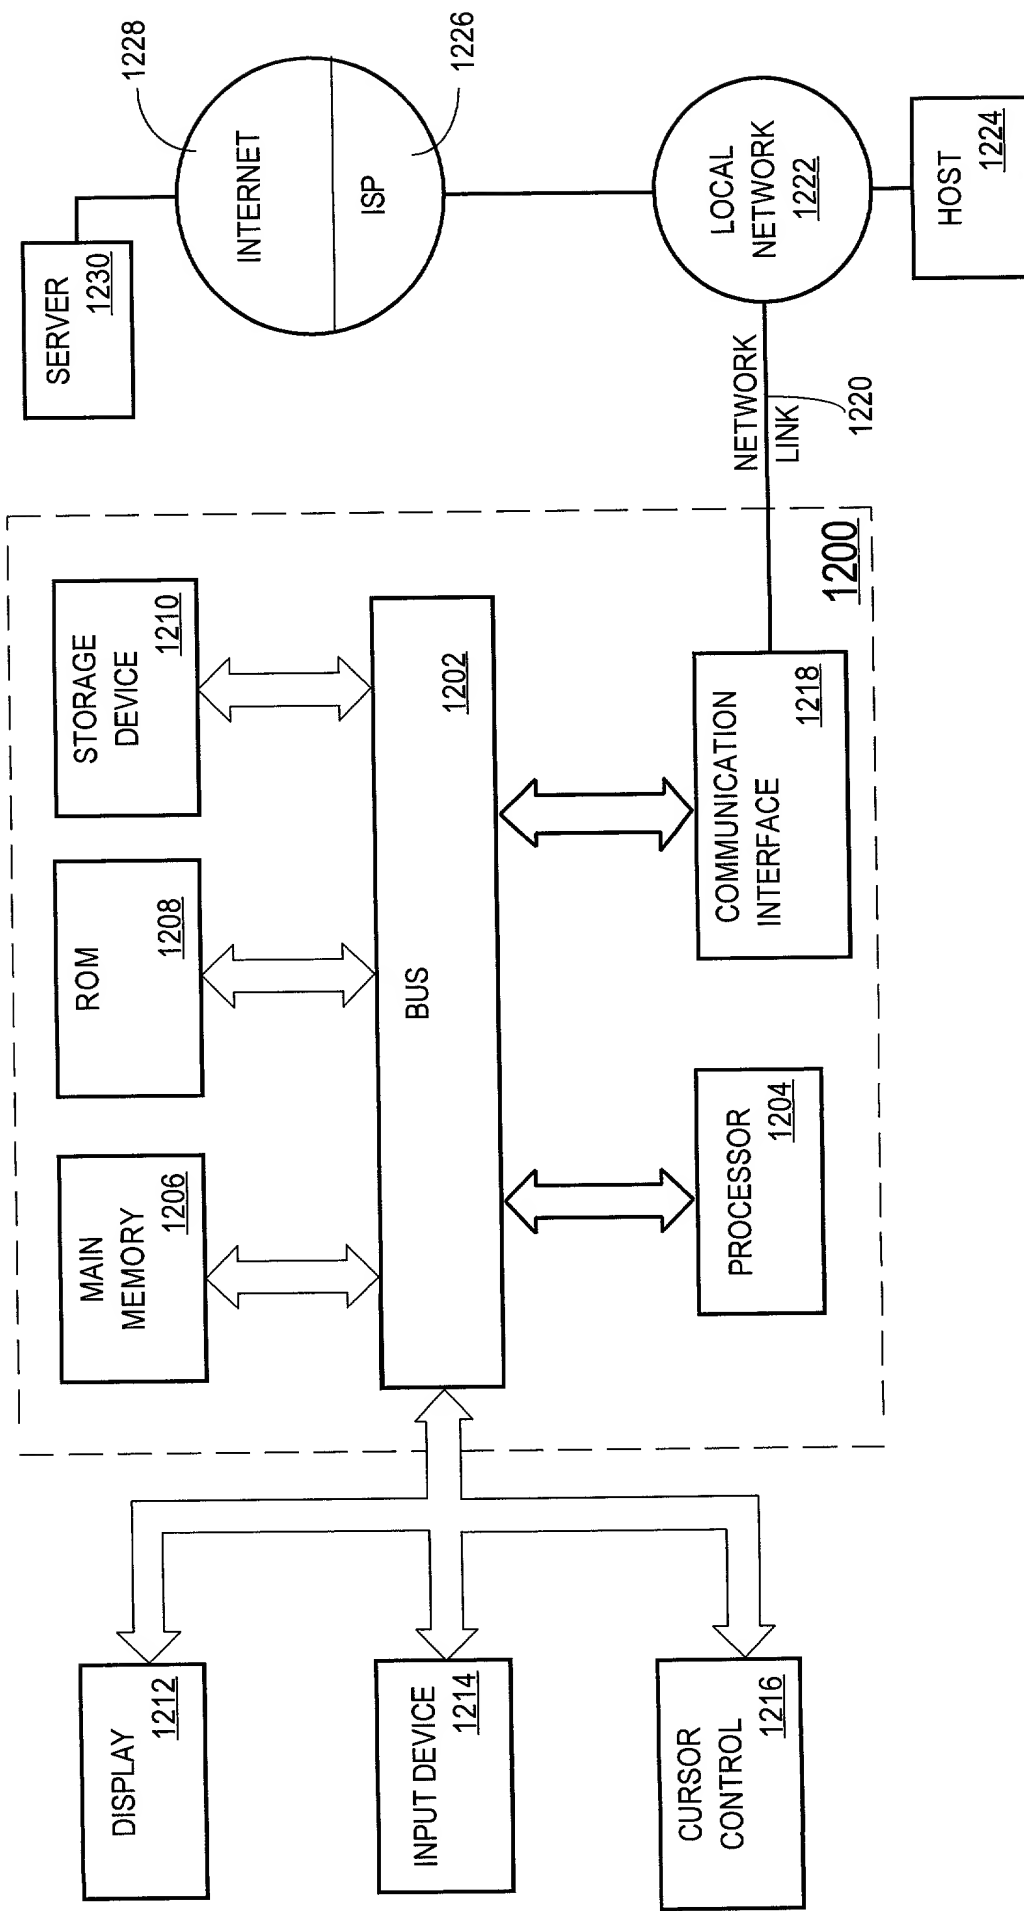

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter claimed and for which a patent is sought on the NETWORK-BASED INTEGRATED DEVICE IDENTIFICATION AND ORDERING SYSTEM, the specification of which

☒ is attached hereto.

☐ was filed on _____ as Application Serial No. _____ and was amended on (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is known to me to be material to patentability in accordance with Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Applications(s):

| Number | Country |
|--------|---------|
| N/A | |

Day/Month/Year filed

Priority Claimed

| |
|--------------------------|
| <input type="checkbox"/> |
| <input type="checkbox"/> |

I hereby claim the benefit under 35 USC §119(e) of any United States provisional application(s) listed below.

Prior Provisional Application(s):

Filing Date:

N/A

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Prior U.S. Application(s):

| Serial No. | Filing Date | Status: Patented, Pending, Abandoned |
|------------|-------------|--------------------------------------|
| N/A | | |

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following attorney(s) and/or agent(s): Christopher Byrne, Reg. No. 32,204; Andrew S. Viger, Reg. No. 28,552; Coleman F. Reif, Reg. No. 38,593; John Maxin, Reg. No. 34,668; Eugene C. Conser, Reg. No. 39,149; Allen R. Tremain, Reg. No. 40,207; Peter Y. Wang, Reg. No., 40,452, all of National Semiconductor, Inc. Also, Edward A. Becker, Reg. No. 37,777; Marcel K. Bingham, Reg. No. 42,327; Carl L. Brandt, Reg. No. 44,555; Brian D. Hickman, Reg. No. 35,894; Christopher J. Palermo, Reg. No. 42,056; Carina M. Tan, Reg. No. 45,769; Bobby K. Truong, Reg. No. 37,499; and Craig G. Holmes, Reg. No. 44,770, all of

HICKMAN PALERMO TRUONG & BECKER LLP
1600 Willow Street
San Jose, CA 95125-5106

with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and all future correspondence should be addressed to them.

Full name of sole or first inventor: Wanda Carol Garrett

Inventor's signature:

Date:

Residence: 17985 Laurel Wood Lane, Morgan Hill, California 95037 USA

Citizenship: USA

Post Office Address:

Full name of second inventor: Martin Garrison

Inventor's signature:

Date:

Residence: 3812 Masters Court, San Jose, California 95111 USA

Citizenship: USA

Post Office Address:

Full name of third inventor: Jeffrey Robert Perry

Inventor's signature:

Date:

Residence: 21862 Corte Madera Lane, Cupertino, California 95014 USA

Citizenship: USA

Post Office Address:

Full name of fourth inventor: Rex Liebert Allison, III

Inventor's signature:

Date:

Residence: 864 Sunlite Drive, Santa Clara, California 95050 USA

Citizenship: USA

Post Office Address:

| | |
|--|-------|
| Full name of fifth inventor: Richard Joel Levin | |
| Inventor's signature: | Date: |
| Residence: 1149 Tangerine Way, Sunnyvale, California 94087 USA | |
| Citizenship: USA | |
| Post Office Address: | |
| Full name of sixth inventor: Vandana Sojorani | |
| Inventor's signature: | Date: |
| Residence: 5320 Borngo Circle, San Jose, California 95123 USA | |
| Citizenship: India | |
| Post Office Address: | |

Date:

Citizenship: USA

Post Office Address:

Inventor's signature:

Date:

Residence: 5320 Borngo Circle, San Jose, California 95123 USA

Citizenship: India

Post Office Address: